



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630




Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600WF (Wolf Pass)	Test Result: Pass

Leveraged System(s): R1208WFTYS, R1304WF, R1304WF0YS, R1304WFTYS, R2000WF, R2208WF0ZS, R2208WFTZS, R2224WFTZS, R2308WFTZS, R2312WF0NP, R2312WFTZS, S2600WF0, S2600WFQ, S2600WFT

Modules Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM24RD8/16MAI	RDIMM	1.2V	16GB	2Gx72	2400	17	E	DR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Micron	MT40A1G8PM-083E:A	8Gb	1024Mx8bit	1652	IDT	C0	(1024Mx8)*2*72		

System Configuration		
SETUP	System #1	System #2
AVL S/N	WP390	WP305
System S/N	BQWF71100390	BQWF71100305
Board Rev. (PBA)	H87179-710	
CPU Type	E5-2690 v4 / 2.60 GHz	
Chipset	C610	
BIOS	0X.01.0008	
BMC / ME	1.02 / 04.00.03.211	
FUR/SDR	1.02	
OS	Windows Server 2012 R2	
Test Tool	iVVSS 2.7.0, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD Hot Pass
4. Memory Stress		HVDD Cold Pass
5. Memory Stress		LVDD Hot Pass
6. Memory Stress		LVDD Cold Pass
Note:		

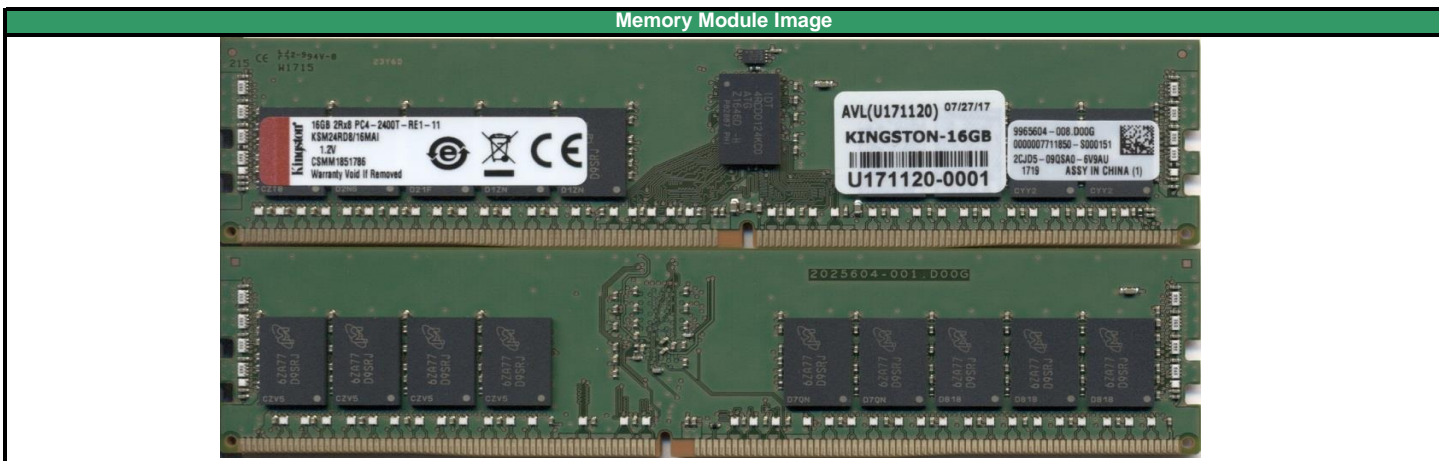

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	10/21/17	AVL A#	U171120	AVL W/O	WF0169
Comments:							

Test Results

4C					
Minimum Loading					
Start Date		10/11/2017			
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	20-0001	P	P	P	P
CPU1 A2					
CPU1 B1	20-0002	P	P	P	P
CPU1 B2					
CPU1 C1	20-0003	P	P	P	P
CPU1 C2					
CPU1 D1	20-0004	P	P	P	P
CPU1 D2					
CPU2 E1	20-0005	P	P	P	P
CPU2 E2					
CPU2 F1	20-0006	P	P	P	P
CPU2 F2					
CPU2 G1	21-0001	P	P	P	P
CPU2 G2					
CPU2 H1	21-0002	P	P	P	P
CPU2 H2					
CPU2 I1	21-0003	P	P	P	P
CPU2 I2					
CPU2 J1	21-0004	P	P	P	P
CPU2 J2					
CPU2 K1	21-0005	P	P	P	P
CPU2 K2					
CPU2 L1	21-0006	P	P	P	P
CPU2 L2					

4C					
Maximum Loading					
Start Date		10/11/17			
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	20-0001	P	P	P	P
CPU1 A2	20-0002	P	P	P	P
CPU1 B1	20-0003	P	P	P	P
CPU1 B2	20-0004	P	P	P	P
CPU1 C1	20-0005	P	P	P	P
CPU1 C2	20-0006	P	P	P	P
CPU1 D1	20-0007	P	P	P	P
CPU1 D2	20-0008	P	P	P	P
CPU2 E1	20-0009	P	P	P	P
CPU2 E2	20-0010	P	P	P	P
CPU2 F1	20-0011	P	P	P	P
CPU2 F2	20-0012	P	P	P	P
CPU2 G1	21-0001	P	P	P	P
CPU2 G2	21-0002	P	P	P	P
CPU2 H1	21-0003	P	P	P	P
CPU2 H2	21-0004	P	P	P	P
CPU2 I1	21-0005	P	P	P	P
CPU2 I2	21-0006	P	P	P	P
CPU2 J1	21-0007	P	P	P	P
CPU2 J2	21-0008	P	P	P	P
CPU2 K1	21-0009	P	P	P	P
CPU2 K2	21-0010	P	P	P	P
CPU2 L1	21-0011	P	P	P	P
CPU2 L2	21-0012	P	P	P	P