



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630




Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600WF (Wolf Pass)	Test Result: Pass

Leveraged System(s): R1208WFTYS, R1304WF, R1304WF0YS, R1304WFTYS, R2000WF, R2208WF0ZS, R2208WFTZS, R2224WFTZS, R2308WFTZS, R2312WF0NP, R2312WFTZS, S2600WF0, S2600WFQ, S2600WFT

Modules Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM26LQ4/64HAIM	LRDIMM	1.2V	64GB	8Gx72	2666	19	D	QR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code		Register Vendor / Rev.		DIMM Composition			
SK Hynix	H5ANAG4NAMR-VKC	8Gb	N/A	1736	Montage	A0	N/A		

System Configuration		
SETUP	System #1	System #2
AVL S/N	WP390	WP305
System S/N	BQWF71100390	BQWF71100305
Board Rev. (PBA)	H87179-710	
CPU Type	E5-2690 v4 / 2.60 GHz	
Chipset	C610	
BIOS	0X.01.0008	
BMC / ME	1.02 / 04.00.03.211	
FUR/SDR	1.02	
OS	Windows Server 2012 R2	
Test Tool	iVVSS 2.7.0, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD Hot Pass
4. Memory Stress		HVDD Cold Pass
5. Memory Stress		LVDD Hot Pass
6. Memory Stress		LVDD Cold Pass
Note:		

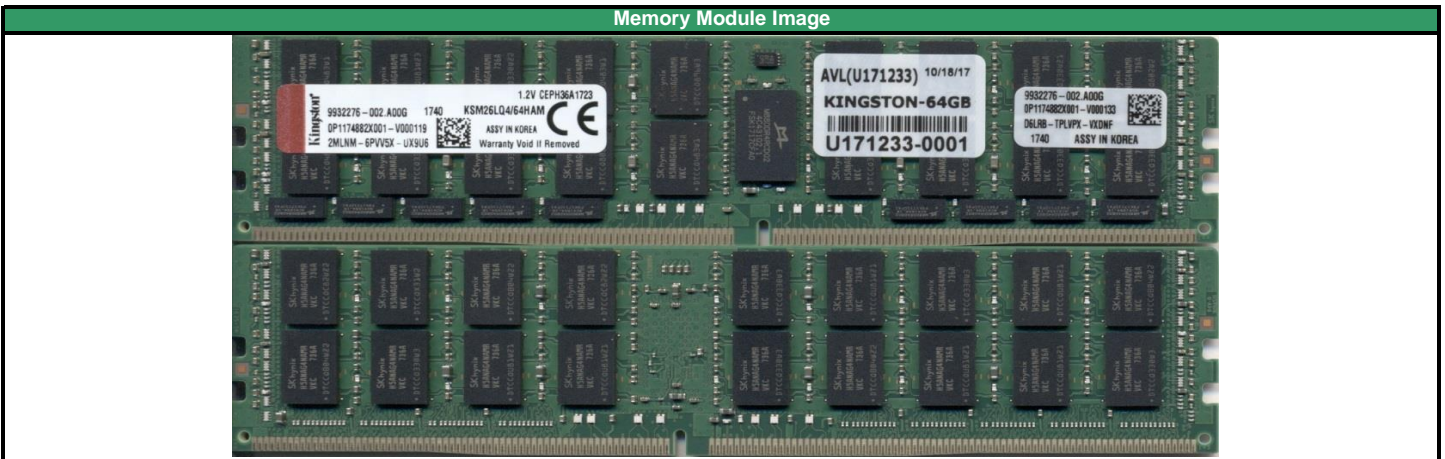

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	11/3/2017	AVL A#	U171233	AVL W/O	WF0489
Comments:							

Test Results

4C					
Minimum Loading					
Start Date		10/27/2017			
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	0001	P	P	P	P
CPU1 A2					
CPU1 B1	0002	P	P	P	P
CPU1 B2					
CPU1 C1	0003	P	P	P	P
CPU1 C2					
CPU1 D1	0004	P	P	P	P
CPU1 D2					
CPU2 E1	0005	P	P	P	P
CPU2 E2					
CPU2 F1	0006	P	P	P	P
CPU2 F2					
CPU2 G1	0007	P	P	P	P
CPU2 G2					
CPU2 H1	0008	P	P	P	P
CPU2 H2					
CPU2 I1	0009	P	P	P	P
CPU2 I2					
CPU2 J1	0010	P	P	P	P
CPU2 J2					
CPU2 K1	0024	P	P	P	P
CPU2 K2					
CPU2 L1	0025	P	P	P	P
CPU2 L2					

4C					
Maximum Loading					
Start Date		10/27/17			
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	0001	P	P	P	P
CPU1 A2	0002	P	P	P	P
CPU1 B1	0003	P	P	P	P
CPU1 B2	0004	P	P	P	P
CPU1 C1	0005	P	P	P	P
CPU1 C2	0006	P	P	P	P
CPU1 D1	0007	P	P	P	P
CPU1 D2	0008	P	P	P	P
CPU2 E1	0009	P	P	P	P
CPU2 E2	0010	P	P	P	P
CPU2 F1	0011	P	P	P	P
CPU2 F2	0012	P	P	P	P
CPU2 G1	0013	P	P	P	P
CPU2 G2	0014	P	P	P	P
CPU2 H1	0015	P	P	P	P
CPU2 H2	0016	P	P	P	P
CPU2 I1	0017	P	P	P	P
CPU2 I2	0018	P	P	P	P
CPU2 J1	0019	P	P	P	P
CPU2 J2	0020	P	P	P	P
CPU2 K1	0021	P	P	P	P
CPU2 K2	0022	P	P	P	P
CPU2 L1	0023	P	P	P	P
CPU2 L2	0024	P	P	P	P