



**Advanced Validation Labs, Inc.**

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630




Intel PCSD Server Memory Compatibility Test Certificate	
Test System: <b>Intel S2600WF (Wolf Pass)</b>	Test Result: <b>Pass</b>

Leveraged System(s): R1208WFTYS, R1304WF, R1304WF0YS, R1304WFTYS, R2000WF, R2208WF0ZS, R2208WFTZS, R2224WFTZS, R2308WFTZS, R2312WF0NP, R2312WFTZS, S2600WF0, S2600WFQ, S2600WFT

Modules Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM26RD8/16HAI	RDIMM	1.2V	16GB	2Gx72	2666	19	E	DR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
SK Hynix	H5AN8G8NAFR-VKC	8Gb	1024Mx8bit	1726	IDT	B1	(1024Mx8)*2*72		

System Configuration		
SETUP	System #1	System #2
AVL S/N	WP390	WP305
System S/N	BQWF71100390	BQWF71100305
Board Rev. (PBA)	H87179-710	
CPU Type	E5-2690 v4 / 2.60 GHz	
Chipset	C610	
BIOS	0X.01.0008	
BMC / ME	1.02 / 04.00.03.211	
FUR/SDR	1.02	
OS	Windows Server 2012 R2	
Test Tool	iVVSS 2.7.0, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	<b>Done</b>
2. SPD Check	DIMM SPD content check for JEDEC compliance	<b>Pass</b>
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD Hot <b>Pass</b>
4. Memory Stress		HVDD Cold <b>Pass</b>
5. Memory Stress		LVDD Hot <b>Pass</b>
6. Memory Stress		LVDD Cold <b>Pass</b>
Note:		

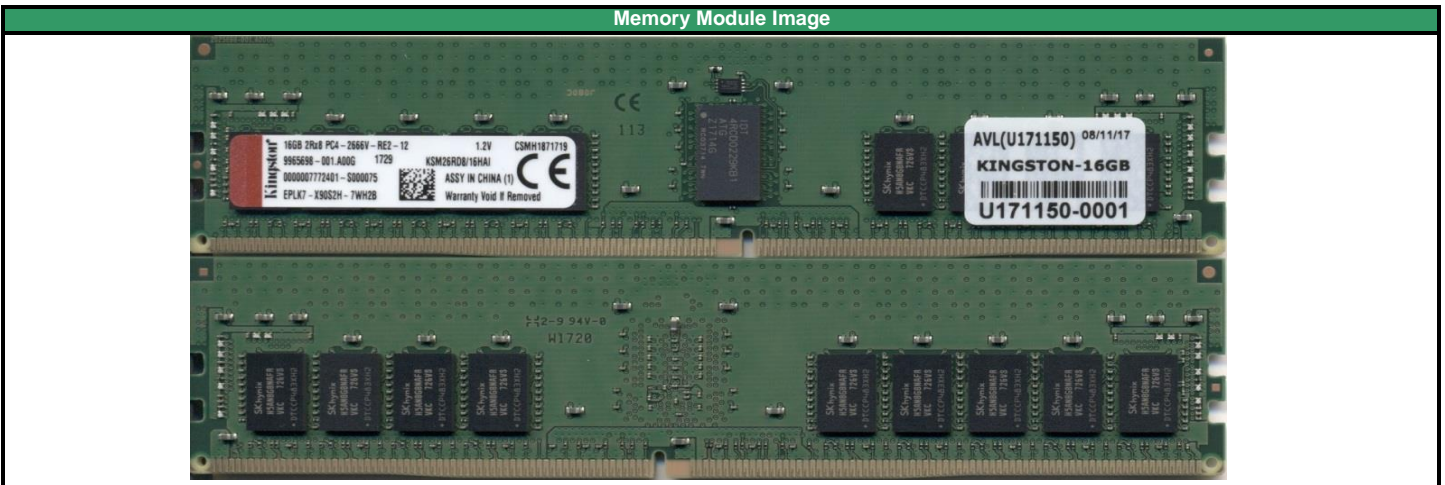

AVL USE ONLY:					
Completed by:	Andy Chang	Completion Date:	10/02/17	AVL A#	U171150
AVL W/O	WF0247				
Comments:					

Test Results

4C					
Minimum Loading					
Start Date		9/18/2017			
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	49-0001	P	P	P	P
CPU1 A2					
CPU1 B1	49-0002	P	P	P	P
CPU1 B2					
CPU1 C1	49-0003	P	P	P	P
CPU1 C2					
CPU1 D1	49-0004	P	P	P	P
CPU1 D2					
CPU2 E1	49-0005	P	P	P	P
CPU2 E2					
CPU2 F1	49-0006	P	P	P	P
CPU2 F2					
CPU2 G1	50-0001	P	P	P	P
CPU2 G2					
CPU2 H1	50-0002	P	P	P	P
CPU2 H2					
CPU2 I1	50-0003	P	P	P	P
CPU2 I2					
CPU2 J1	50-0004	P	P	P	P
CPU2 J2					
CPU2 K1	50-0005	P	P	P	P
CPU2 K2					
CPU2 L1	50-0006	P	P	P	P
CPU2 L2					

4C					
Maximum Loading					
Start Date		09/18/17			
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	49-0001	P	P	P	P
CPU1 A2	49-0002	P	P	P	P
CPU1 B1	49-0003	P	P	P	P
CPU1 B2	49-0004	P	P	P	P
CPU1 C1	49-0005	P	P	P	P
CPU1 C2	49-0006	P	P	P	P
CPU1 D1	49-0007	P	P	P	P
CPU1 D2	49-0008	P	P	P	P
CPU2 E1	49-0009	P	P	P	P
CPU2 E2	49-0010	P	P	P	P
CPU2 F1	49-0011	P	P	P	P
CPU2 F2	49-0012	P	P	P	P
CPU2 G1	50-0001	P	P	P	P
CPU2 G2	50-0002	P	P	P	P
CPU2 H1	50-0003	P	P	P	P
CPU2 H2	50-0004	P	P	P	P
CPU2 I1	50-0005	P	P	P	P
CPU2 I2	50-0006	P	P	P	P
CPU2 J1	50-0007	P	P	P	P
CPU2 J2	50-0008	P	P	P	P
CPU2 K1	50-0009	P	P	P	P
CPU2 K2	50-0010	P	P	P	P
CPU2 L1	50-0011	P	P	P	P
CPU2 L2	50-0012	P	P	P	P