



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630




Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600WF (Wolf Pass)	Test Result: Pass

Leveraged System(s): R1208WFTYS, R1304WF, R1304WF0YS, R1304WFTYS, R2000WF, R2208WF0ZS, R2208WFTZS, R2224WFTZS, R2308WFTZS, R2312WF0NP, R2312WFTZS, S2600WF0, S2600WFQ, S2600WFT

Modules Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM32RS8/8MRR	RDIMM	1.2V	8GB	1Gx72	3200	22	D1	SR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Micron	MT40A1G8SA-062E:R	8Gb	1024Mx8bit	2130	Rambus	B0	(1024Mx8)72		

System Configuration		
SETUP	System #1	System #2
AVL S/N	H170060-003	N/A
System S/N	BQWF83600199	BQWF71900128
Board Rev. (PBA)	H48104-863	H48104-703
CPU Type	Intel CLX 2.50 GHz Gold 6252 / 2.1 GHz	
Chipset	Intel 62X Series	
BIOS	02.01.5010	02.01.0013
BMC / ME	2.48 / 04.01.04.381	2.48 / 04.01.04.423
FUR/SDR	2.01	2.01
OS	Windows Server 2016 Standard	
Test Tool	iWVSS 2.9.2, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD Hot Pass
4. Memory Stress		HVDD Cold Pass
5. Memory Stress		LVDD Hot Pass
6. Memory Stress		LVDD Cold Pass
Note:		

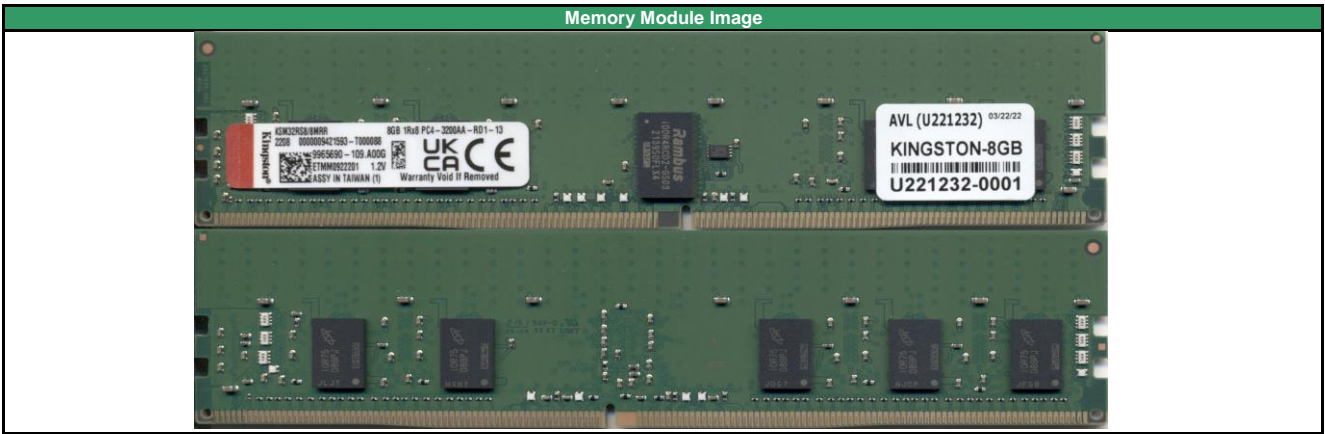

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	04/20/2022	AVL A#	U221232	AVL W/O	WG1306
Comments:							

4C Minimum Loading						
Start Date	4/12/2022					
DIMM Voltage	1.22v / 1.16v					
DIMM	S/N	A	B	C	D	
CPU1 A1	0026	P	P	P	P	P
CPU1 A2						
CPU1 B1	0027	P	P	P	P	P
CPU1 B2						
CPU1 C1	0028	P	P	P	P	P
CPU1 C2						
CPU1 D1	0029	P	P	P	P	P
CPU1 D2						
CPU1 E1	0030	P	P	P	P	P
CPU1 E2						
CPU1 F1	0031	P	P	P	P	P
CPU1 F2						
CPU2 G1	0032	P	P	P	P	P
CPU2 G2						
CPU2 H1	0033	P	P	P	P	P
CPU2 H2						
CPU2 I1	0034	P	P	P	P	P
CPU2 I2						
CPU2 J1	0035	P	P	P	P	P
CPU2 J2						
CPU2 K1	0036	P	P	P	P	P
CPU2 K2						
CPU2 L1	0037	P	P	P	P	P
CPU2 L2						

4C Maximum Loading						
Start Date	04/12/22					
DIMM Voltage	1.22v / 1.16v					
DIMM	S/N	A	B	C	D	
CPU1 A1	0026	P	P	P	P	P
CPU1 A2	0027	P	P	P	P	P
CPU1 B1	0028	P	P	P	P	P
CPU1 B2	0029	P	P	P	P	P
CPU1 C1	0030	P	P	P	P	P
CPU1 C2	0031	P	P	P	P	P
CPU1 D1	0032	P	P	P	P	P
CPU1 D2	0033	P	P	P	P	P
CPU1 E1	0034	P	P	P	P	P
CPU1 E2	0035	P	P	P	P	P
CPU1 F1	0036	P	P	P	P	P
CPU1 F2	0037	P	P	P	P	P
CPU2 G1	0038	P	P	P	P	P
CPU2 G2	0039	P	P	P	P	P
CPU2 H1	0040	P	P	P	P	P
CPU2 H2	0041	P	P	P	P	P
CPU2 I1	0042	P	P	P	P	P
CPU2 I2	0043	P	P	P	P	P
CPU2 J1	0044	P	P	P	P	P
CPU2 J2	0045	P	P	P	P	P
CPU2 K1	0046	P	P	P	P	P
CPU2 K2	0047	P	P	P	P	P
CPU2 L1	0048	P	P	P	P	P
CPU2 L2	0049	P	P	P	P	P