



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630



Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600BP (Buchanan Pass)	Test Result: Pass


Leveraged System(s): BBS2600BPB,BBS2600BPQ,BBS2600BPS,HNS2600BPB,HNS2600BPB24,HNS2600BPQ,HNS2600BPQ24,HNS2600BPS,HNS2600BPS24,S2600BP

Modules Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM29LQ4/64HCM	LRDIMM	1.2V	64GB	8Gx72	2933	21	D2	QR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
SK Hynix	H5ANAG4NCPR-WMC	8Gb	2048Mx4bit	1910	Montage	H1	(2048Mx4)*4*72		

System Configuration		
SETUP	System #1	System #2
AVL S/N	H170047-003	H170047-004
System S/N	QSBP83210875	QSBP83210819
Board Rev. (PBA)	H87926-553	
CPU Type	Intel CLX 2.20 GHz	
Chipset	Intel 62X Series	
BIOS	01.0261	
BMC / ME	1.83 / 04.01.03.237	
FUR/SDR	1.38	
OS	Windows Server 2016 Standard	
Test Tool	iWVSS 2.8.0, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD Hot Pass
4. Memory Stress		HVDD Cold Pass
5. Memory Stress		LVDD Hot Pass
6. Memory Stress		LVDD Cold Pass
Note:		

Memory Module Image

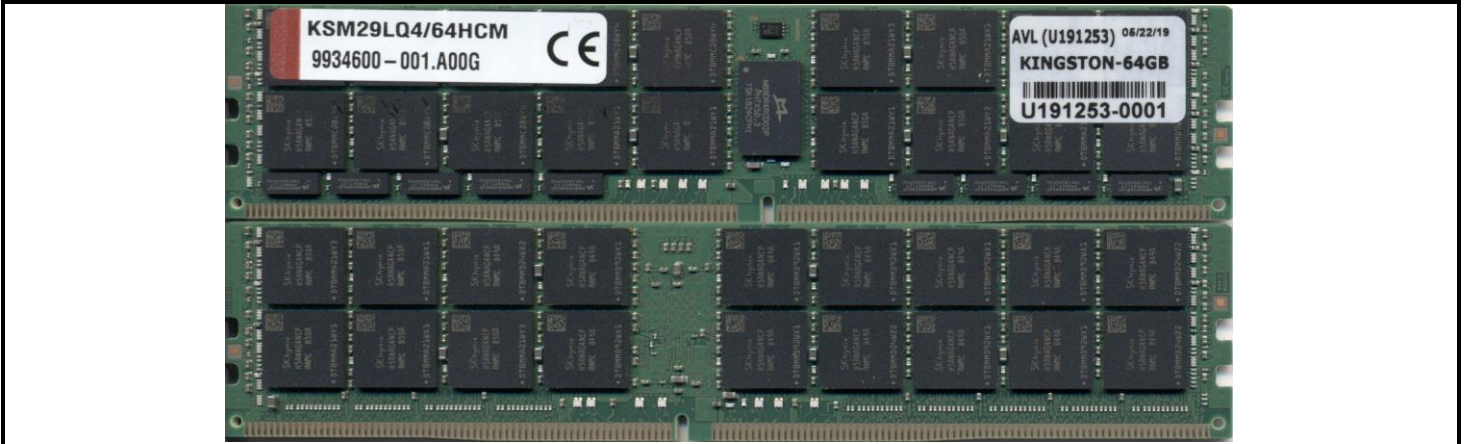

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	07/08/2019	AVL A#	U191253	AVL W/O	WF2486
Comments:							

Test Results

4C Minimum Loading					
Start Date		6/3/2019			
DIMM Voltage		1.22v / 1.16v			
DIMM	S/N	A	B	C	D
CPU1 A1	52-012	P	P	P	P
CPU1 A2					
CPU1 B1	52-013	P	P	P	P
CPU1 C1	52-014	P	P	P	P
CPU1 D1	52-015	P	P	P	P
CPU1 D2					
CPU1 E1	52-016	P	P	P	P
CPU1 F1	52-017	P	P	P	P
CPU2 G1	53-019	P	P	P	P
CPU2 G2					
CPU2 H1	53-020	P	P	P	P
CPU2 I1	53-021	P	P	P	P
CPU2 J1	53-022	P	P	P	P
CPU2 J2					
CPU2 K1	53-023	P	P	P	P
CPU2 L1	53-024	P	P	P	P

4C Maximum Loading					
Start Date		06/03/19			
DIMM Voltage		1.22v / 1.16v			
DIMM	S/N	A	B	C	D
CPU1 A1	52-001	P	P	P	P
CPU1 A2	52-002	P	P	P	P
CPU1 B1	52-003	P	P	P	P
CPU1 C1	52-004	P	P	P	P
CPU1 D1	52-005	P	P	P	P
CPU1 D2	52-006	P	P	P	P
CPU1 E1	52-007	P	P	P	P
CPU1 F1	52-008	P	P	P	P
CPU2 G1	53-001	P	P	P	P
CPU2 G2	53-002	P	P	P	P
CPU2 H1	53-003	P	P	P	P
CPU2 I1	53-004	P	P	P	P
CPU2 J1	53-005	P	P	P	P
CPU2 J2	53-006	P	P	P	P
CPU2 K1	53-007	P	P	P	P
CPU2 L1	53-008	P	P	P	P