



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630



Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600BP (Buchanan Pass)	Test Result: Pass

Leveraged System(s): BBS2600BPB,BBS2600BPQ,BBS2600BPS,HNS2600BPB,HNS2600BPB24,HNS2600BPQ,HNS2600BPQ24,HNS2600BPS,HNS2600BPS24,S2600BP

Modules Information

DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM29RS8/8HCL	RDIMM	1.2V	8GB	1Gx72	2933	21	D1	SR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
SK Hynix	H5AN8G8NCJR-WMC	8Gb 1024Mx8bit 1915			IDT C1		(1024Mx8)*72		

System Configuration


SETUP	System #1	System #2
AVL S/N	H170047-003	H170047-004
System S/N	QSBP83210875	QSBP83210819
Board Rev. (PBA)	H87926-553	
CPU Type	Intel CLX 2.20 GHz	
Chipset	Intel 62X Series	
BIOS	01.0261	
BMC / ME	1.83 / 04.01.03.237	
FUR/SDR	1.38	
OS	Windows Server 2016 Standard	
Test Tool	iWVSS 2.8.0, SELViewer, Syscfg, WinPIRA	

Testing Summary

Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD Hot Pass
4. Memory Stress		HVDD Cold Pass
5. Memory Stress		LVDD Hot Pass
6. Memory Stress		LVDD Cold Pass

Note:

Memory Module Image

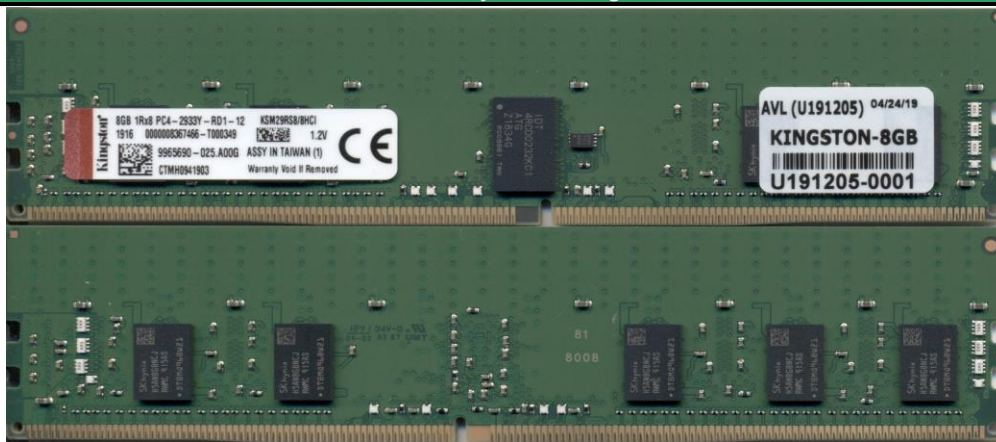

AVL USE ONLY:

Completed by:	Andy Chang	Completion Date:	05/28/2019	AVL A#	U191205	AVL W/O	WF2325
---------------	------------	------------------	------------	--------	---------	---------	--------

Comments:

Test Results

4C Minimum Loading					
Start Date		5/14/2019			
DIMM Voltage		1.22v / 1.16v			
DIMM	S/N	A	B	C	D
CPU1 A1	05-018	P	P	P	P
CPU1 A2					
CPU1 B1	05-019	P	P	P	P
CPU1 C1	05-020	P	P	P	P
CPU1 D1	05-021	P	P	P	P
CPU1 D2					
CPU1 E1	05-022	P	P	P	P
CPU1 F1	05-023	P	P	P	P
CPU2 G1	06-001	P	P	P	P
CPU2 G2					
CPU2 H1	06-002	P	P	P	P
CPU2 I1	06-003	P	P	P	P
CPU2 J1	06-004	P	P	P	P
CPU2 J2					
CPU2 K1	06-005	P	P	P	P
CPU2 L1	06-006	P	P	P	P

4C Maximum Loading					
Start Date		05/14/19			
DIMM Voltage		1.22v / 1.16v			
DIMM	S/N	A	B	C	D
CPU1 A1	05-010	P	P	P	P
CPU1 A2	05-011	P	P	P	P
CPU1 B1	05-012	P	P	P	P
CPU1 C1	05-013	P	P	P	P
CPU1 D1	05-014	P	P	P	P
CPU1 D2	05-015	P	P	P	P
CPU1 E1	05-016	P	P	P	P
CPU1 F1	05-017	P	P	P	P
CPU2 G1	06-010	P	P	P	P
CPU2 G2	06-011	P	P	P	P
CPU2 H1	06-012	P	P	P	P
CPU2 I1	06-013	P	P	P	P
CPU2 J1	06-014	P	P	P	P
CPU2 J2	06-015	P	P	P	P
CPU2 K1	06-016	P	P	P	P
CPU2 L1	06-017	P	P	P	P