

Server Memory Compatibility Test Certificate


Test System: **Supernmicro X10DRi** Test Result: **Pass**

Leveraged System(s): X10DRI-T, X10DAI, X10DAC, X10DRH-CT, X10DRW-i / X10DRW-iT, X10DDW-I / X10DDW-iN, X10DRG-H / X10DRG-HT, X10DRT-P / X10DRT-PT, X10DRT-PIBQ / X10DRT-PIBF, X10DRFR / X10DRFR-T / X10DRH-C, X10DRH-CLN4, X10DRH-ILN4, X10DRT-PS, X10DRX, X10DRU-X, X10DRU-XLL, X10DRFF-CG, X10DRFF-CTG, X10DRFF-IG, X10DRFF-ITG, X10DGQ, X10DRG-Q

Module Specifications									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM24RS8/8MEI	RDIMM	1.20V	8GB	1Gx72	2400	17	D	SR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Micron	MT40A1G8SA-075:E	8Gb 1024Mx8bit 1804			IDT C0		(1024Mx4)*72		

System Configuration	
SETUP	System Information
AVL S/N	SV2271
System S/N	0M148004057
Board Rev. (PBA)	1.01
CPU Type	Intel E5-2650 v4 (BDW) x2
Chipset	Intel C612
BIOS / Date	2.1a / 5/5/17
BMC / ME	1.94/3.0.6.267
FRU/SDR	1.02
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7

Testing Summary				
Test Items	Test Description		Test Results	
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS		Done	
2. SPD Check	DIMM SPD content check for JEDEC compliance		Pass	
3. Reset Cycle	1 DIMM Per Channel when applicable		Pass	
4a. Memory Stress	DIMM Loading per spec	45°C	24 Hours	Pass
4c. Reset Cycle			200 loops per config	Pass
Note:				

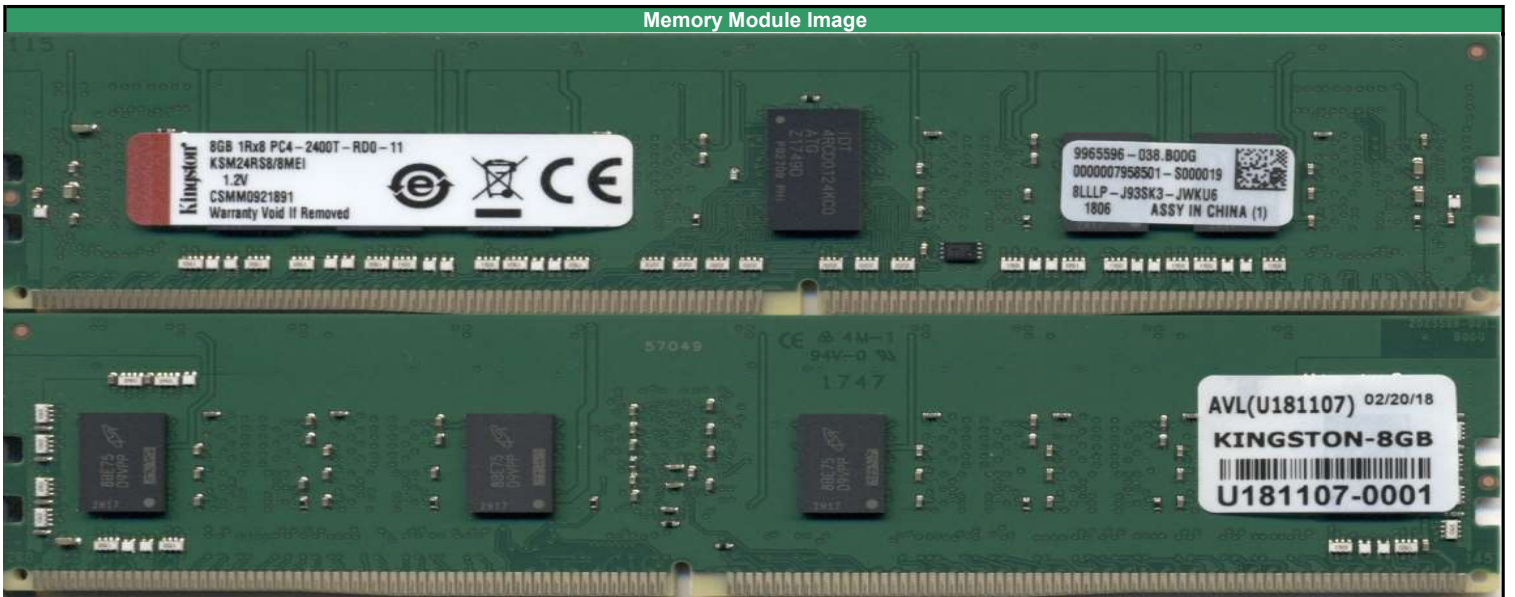

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	4/20/2018	AVL A#	U181107	AVL W/O	WF0972

Comments: