

Server Memory Compatibility Test Certificate

Test System: **Supermicro X10SRI-F** Test Result: **Pass**

Leveraged System(s): X10SRL-F, X10SRH-CF, X10SRH-CLN4F, X10SRG-F, X10SRW-F, X10SRA, X10SRA-F, X10SRM-F, X10SRM-TF, X10SRG-F, X10SRW-F

Module Specifications

Rev. 1/13/2015

DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM26RD4/32MEI	RDIMM	1.20V	32GB	4Gx72	2666	19	B2	DR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Micron	MT40A2G4SA-075:E	8Gb			2048Mx4bit 1802,1932		IDT B1		(4096Mx4)*72

System Configuration


SETUP	System Information
AVL S/N	SV2269
System S/N	0M148S016129
Board Rev. (PBA)	1.01
CPU Type	Intel E5-2650 v4 (BDW) x1
Chipset	Intel C612
BIOS / Date	3.1c /5/19/2019
BMC / ME	1.89/3.0.5.422
FRU/SDR	N/A
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7 /Memtest86+

Testing Summary

Test Items	Test Description			Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS			Done
2. SPD Check	DIMM SPD content check for JEDEC compliance			Pass
3. Reset Cycle	Max Load	Room	200 Loops	Pass
4. Memoy Stress - Memtest86+		Room	2 Loops	Pass
5. Memory Stress-Stressapptest		40°C	24Hrs	Pass

Note:

Memory Module Image

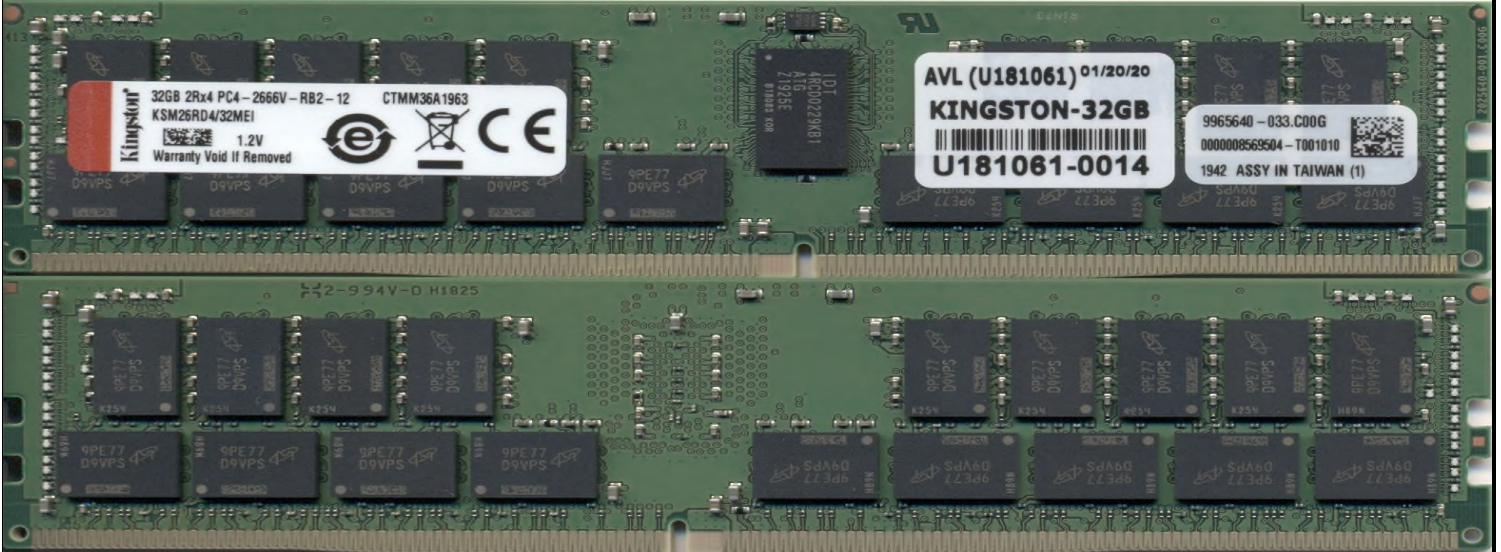

AVL USE ONLY:

Completed by:	Van Nguyen	Completion Date:	1/25/2020	AVL A#	U181061	AVL W/O	WF5024
Comments:							