

Server Memory Compatibility Test Certificate

Test System: **Supermicro X11DPI-N (System SYS-6029P-TR)** Test Result: **Pass**


Leveraged Board(s) / System(s): X11DPI-N, X11DPI-NT, X11DAI-N, X11DPH-T, X11DPH-I, X11DPH-TQ, X11DPG-QT, X11DPT-PS, X11DPX-T, B11DRT-P, SYS-7039A-I, SYS-7049A-T, SSG-2029P-E1CR24H, SSG-2029P-E1CR24L, SSG-6029P-E1CR12T, SSG-6029P-E1CR16T, SSG-6039P-E1CR16H, SSG-6039P-E1CR16L, SYS-2029P-C1RT, SYS-2029P-C1R, SYS-6029P-TRT, SYS-6029P-TR, SYS-7049P-TRT, SYS-7049P-TR, SSG-2029P-ACR24H, SSG-2029P-ACR24L, SSG-6049P-E1CR36H, SYS-7049GP-TRT, SYS-2029TP-HTR, SYS-2029TP-HC0R, SYS-2029TP-HC1R, SYS-6029TP-HTR, SYS-6029TP-HC1R, SYS-6029TP-HC0R, SYS-2029P-TXRT, SYS-6039P-TXRT, SBI-4129P-C2N, SBI-4129P-T3N

Module Specifications										Rev. 05/16/19
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank	
Kingston	KSM26RD4/64MER	RDIMM	1.2V	64GB	8192Mx72	2666	19-19-19	B4	2	
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition			
Micron Technology Inc.	MT40A4G4JC-062E:E	16Gb	4096Mx4	2018	Rambus	B0	(4096Mx4)*72			

System Configuration	
SETUP	System Information
AVL S/N	H180200-001
System S/N	n/a
Board Rev. (PBA)	n/a
CPU Type	Intel Xeon Gold 6252(PLCX) x2
Chipset	C621
BIOS / Date	3.3 /2/21/20
BMC / ME	1.45
FRU/SDR	n/a
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7/Memtest86+

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Reset Cycle	200 Loops	Pass
4. Memoy Stress - Memtest86+	Room	2 Loops
5. Memory Stress-Stressapptest	40°C	24Hrs
	Max Load	

Note:

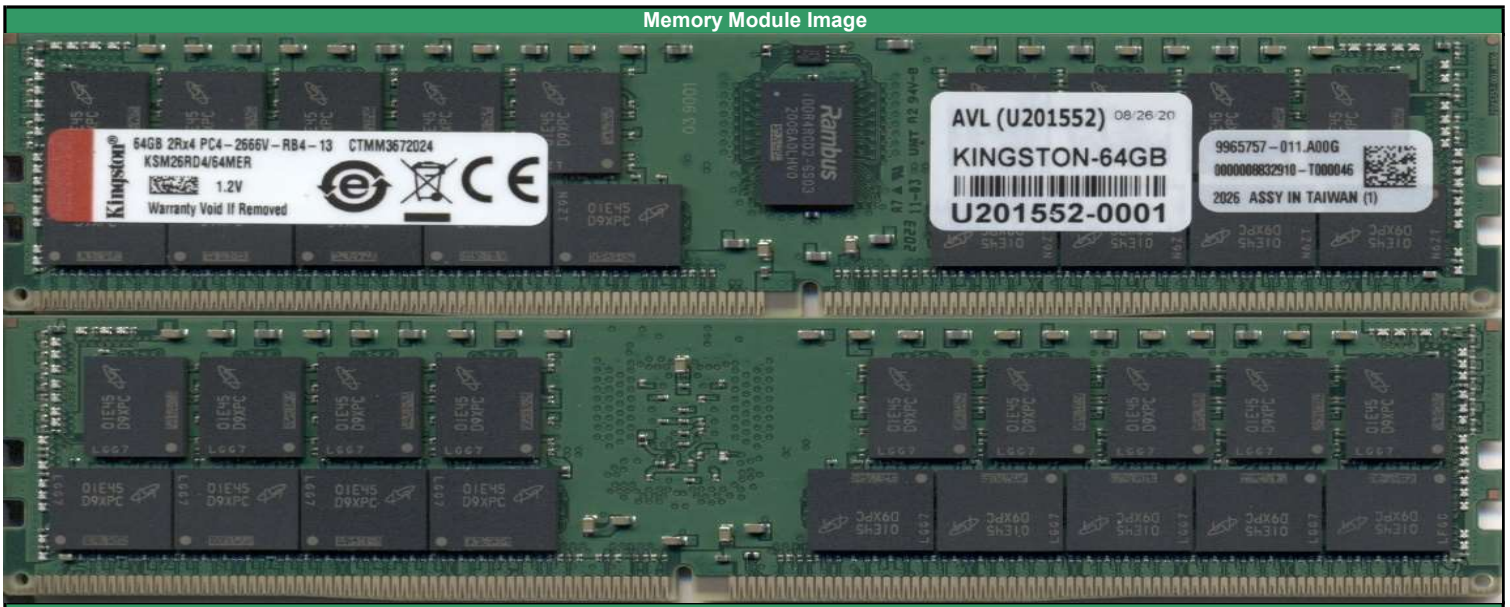

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	10/6/2020	AVL A#	U201552	AVL W/O	WF7441
Comments:							