

Server Memory Compatibility Test Certificate

Test System: **Supermicro X11SPW-TF (System SYS-5029P-WTR)** Test Result: **Pass**

Leveraged Board(s) / System(s): X11SPW-TF, X11SPW-CTF, X11SPM-TPF, X11SPM-TF, X11SPM-F, X11SPG-TF, SYS-1019P-WTR, SYS-5019P-WT, SYS-5019P-WTR, SYS-5029P-WTR, SYS-5019GP-TT, SYS-1019GP-TT

Module Specifications

Rev. 3/27/2018

DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM26RD8/16MEI	RDIMM	1.2V	16GB	2Gx72	2666	19	E2	DR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code	Register Vendor / Rev.	DIMM Composition					
Kingston	MT40A1G8SA-075:E	8Gb	1024Mx8bit	1752	IDT	B1	(2048x8)*72		

System Configuration


SETUP	System Information
AVL S/N	H180199-001
System S/N	N80205
Board Rev. (PBA)	1.02
CPU Type	Intel Xeon Gold 6130(SKX) x2
Chipset	Skylake
BIOS / Date	2.0b /2/26/18
BMC / ME	n/a
FRU/SDR	n/a
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7

Testing Summary

Test Items	Test Description	Test Results	
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done	
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass	
3. Reset Cycle	1 DIMM Per Channel when applicable	Pass	
4a. Memory Stress	DIMM Loading per spec	45°C	
4c. Reset Cycle			24 Hours
		200 loops per config	Pass

Note:

Memory Module Image

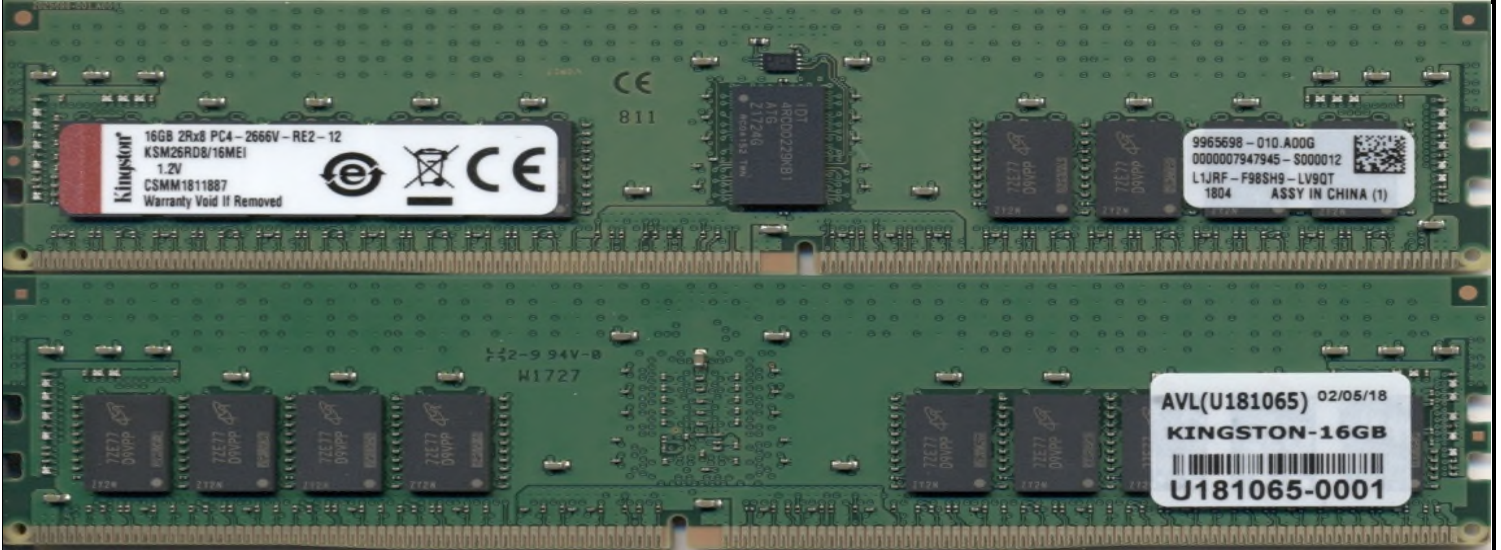

AVL USE ONLY:

Completed by:	Van Nguyen	Completion Date:	5/5/2018	AVL A#	U181065	AVL WO	WF1165
---------------	------------	------------------	----------	--------	---------	--------	--------

Comments: