

**Server Memory Compatibility Test Certificate**

Test System: **Supermicro X10SRI-F** Test Result: **Pass**

Leveraged System(s): X10SRL-F, X10SRH-CF, X10SRH-CLN4F, X10SRG-F, X10SRW-F, X10SRA, X10SRA-F, X10SRM-F, X10SRM-TF, X10SRG-F, X10SRW-F

**Module Specifications**

Rev. 1/13/2015

DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM26RS4/16MEI	RDIMM	1.20V	16GB	2Gx72	2666	19	C2	SR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Micron	MT40A2G4SA-075:E	8Gb 2048Mx4bit 1802			IDT B1		(2048x8)*72		

**System Configuration**


SETUP	System Information
AVL S/N	SV2269
System S/N	0M148S016129
Board Rev. (PBA)	1.01
CPU Type	Intel E5-2650 v4 (BDW) x1
Chipset	Intel C612
BIOS / Date	3.1c /5/19/2019
BMC / ME	1.89/3.0.5.422
FRU/SDR	N/A
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7 /Memtest86+

**Testing Summary**

Test Items	Test Description		Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS		<b>Done</b>
2. SPD Check	DIMM SPD content check for JEDEC compliance		<b>Pass</b>
3. Reset Cycle	Max Load	Room 200 Loops	<b>Pass</b>
4. Memory Stress - Memtest86+		2 Loops	<b>Pass</b>
5. Memory Stress-Stressapptest		40°C 24Hrs	<b>Pass</b>

Note:

**Memory Module Image**

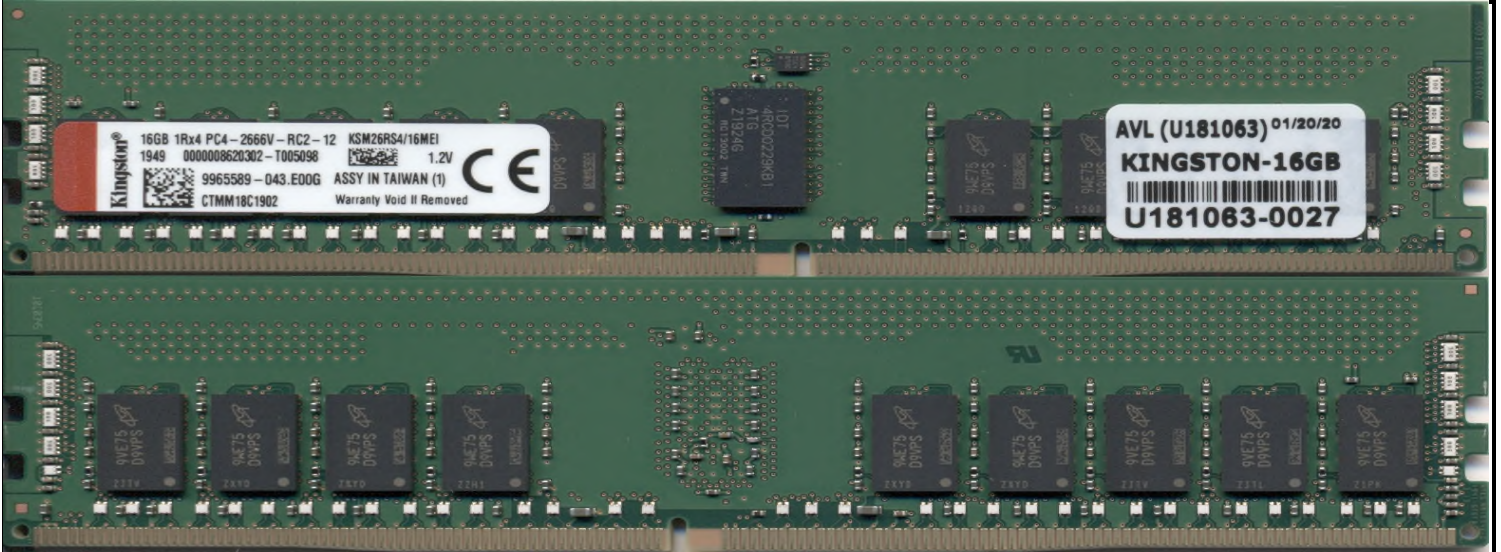

**AVL USE ONLY:**

Completed by:	Van Nguyen	Completion Date:	1/23/2020	AVL A#	U181063	AVL W/O	WF5028
Comments:							