



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630




Server Memory Compatibility Test Certificate	
Test System: Supermicro X10DRi	Test Result: Pass

Leveraged System(s): X10DRi-T, X10DAi, X10DAC, X10DRH-CT, X10DRW-i / X10DRW-IT, X10DDW-I / X10DDW-IN, X10DRG-H / X10DRG-HT, X10DRT-P / X10DRT-PT, X10DRT-PIBQ / X10DRT-PIBF, X10DRFR / X10DRFR-T / X10DRH-C, X10DRH-CLN4, X10DRH-iLN4, X10DRT-PS, X10DRX, X10DRU-X, X10DRU-XLL, X10DRFF-CG, X10DRFF-CTG, X10DRFF-IG,

Module Specifications									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM26RS8L/8MEI	PC4-2666 RDIMM	1.20V	8GB	1Gx72	2666	19	G0	SR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Micron	MT40A1G8SA-075:E	8Gb 1024Mx8bit 1816			IDT B1		(1024x8)*72		

System Configuration	
SETUP	System Information
AVL S/N	SV2271
System S/N	0M148004057
Board Rev. (PBA)	1.01
CPU Type	Intel E5-2650 v4 (BDW) x2
Chipset	Intel C612
BIOS / Date	3.1 /09/14/2018
BMC / ME	1.94/3.0.6.267
FRU/SDR	1.02
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7

Testing Summary			
Test Items	Test Description		Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS		Done
2. SPD Check	DIMM SPD content check for JEDEC compliance		Pass
3. Reset Cycle	1 DIMM Per Channel when applicable		Pass
4a. Memory Stress	DIMM Loading per spec	45°C	24 Hours
4c. Reset Cycle			200 loops per config
Note:			

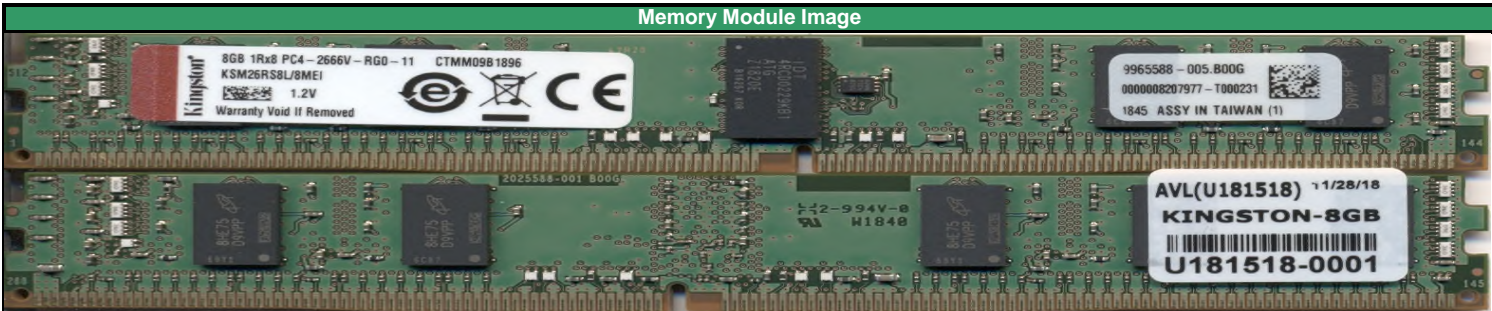

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	2/26/2019	AVL A#	U181518	AVL W/O	WF1824
Comments:							