

**Server Memory Compatibility Test Certificate**

Test System: **Supermicro X11DPi-N (System SYS-6029P-TR)** Test Result: **Pass**


Leveraged Board(s) / System(s): X11DPi-N, X11DPi-NT, X11DAi-N, X11DPH-T, X11DPH-I, X11DPH-TQ, X11DPG-QT, X11DPT-PS, X11DPX-T, B11DRT-P, SYS-7039A-I, SYS-7049A-T, SSG-2029P-E1CR24H, SSG-2029P-E1CR24L, SSG-6029P-E1CR12T, SSG-6029P-E1CR16T, SSG-6039P-E1CR16H, SSG-6039P-E1CR16L, SYS-2029P-C1RT, SYS-2029P-C1R, SYS-6029P-TRT, SYS-6029P-TR, SYS-7049P-TRT, SYS-7049P-TR, SSG-2029P-ACR24H, SSG-2029P-ACR24L, SSG-6049P-E1CR36H, SYS-7049GP-TRT, SYS-2029TP-HTR, SYS-2029TP-HC0R, SYS-2029TP-HC1R, SYS-6029TP-HTR, SYS-6029TP-HC1R, SYS-6029TP-HC0R, SYS-2029P-TXRT, SYS-6039P-TXRT, SBI-4129P-C2N, SBI-4129P-T3N

Module Specifications									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM29RD4/64MER	RDIMM	1.2V	64GB	8192Mx72	2933	21-21-21	B4	2
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code		Register Vendor / Rev.		DIMM Composition			
Micron Technology Inc.	MT40A4G4JC-062E:E	16Gb		4096Mx4 2018		Rambus 0		(4096Mx4)*72	

System Configuration	
SETUP	System Information
AVL S/N	H180200-001
System S/N	n/a
Board Rev. (PBA)	n/a
CPU Type	Intel Xeon Gold 6252(PLCX) x2
Chipset	C621
BIOS / Date	3.3 /2/21/20
BMC / ME	1.45
FRU/SDR	n/a
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7/Memtest86+

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Reset Cycle	200 Loops	Pass
4. Memoy Stress - Memtest86+	Room	2 Loops
5. Memory Stress-Stressapptest	40°C	24Hrs

Note:

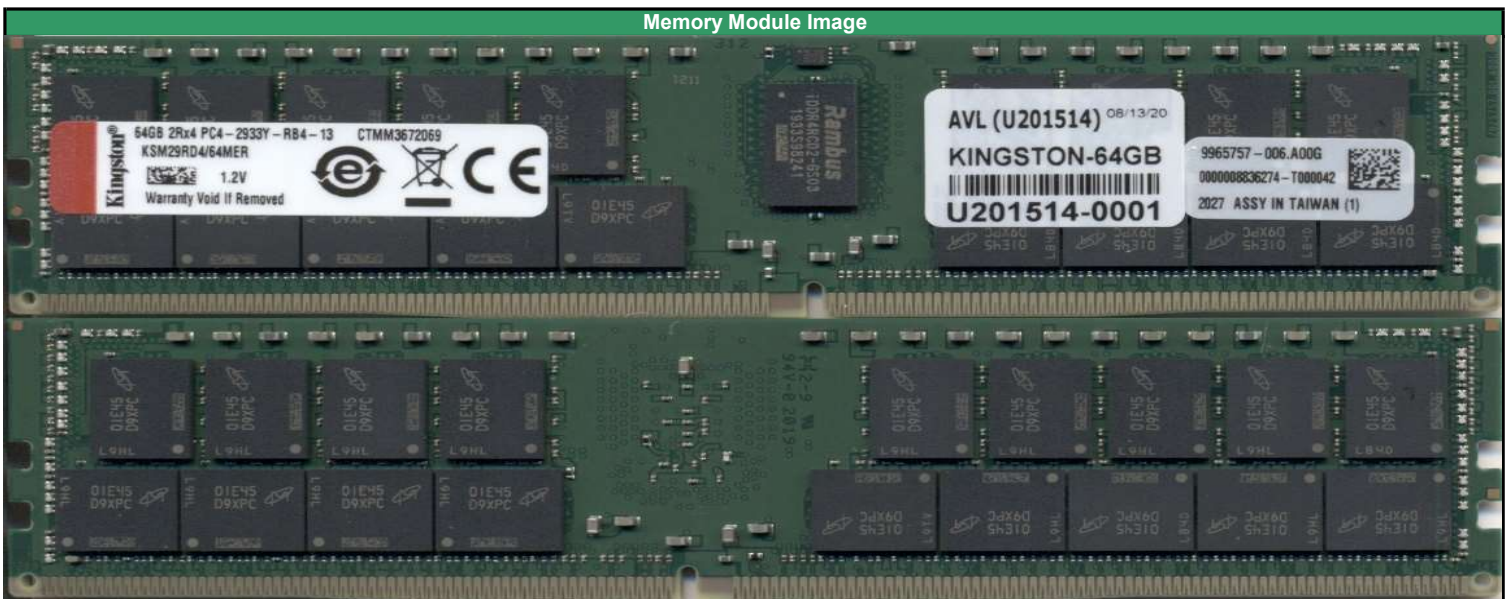

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	9/23/2020	AVL A#	U201514	AVL W/O	WF7218
Comments:							