

Server Memory Compatibility Test Certificate

Test System: **Supermicro X11DPi-N (System SYS-6029P-TR)** Test Result: **Pass**

Leveraged Board(s) / System(s): X11DPi-N, X11DPi-NT, X11DAi-N, X11DPH-T, X11DPH-I, X11DPH-TQ, X11DPG-QT, X11DPT-PS, X11DPX-T, B11DRT-P, SYS-7039A-I, SYS-7049A-T, SSG-2029P-E1CR24H, SSG-2029P-E1CR24L, SSG-6029P-E1CR12T, SSG-6029P-E1CR16T, SSG-6039P-E1CR16H, SSG-6039P-E1CR16L, SYS-2029P-C1RT, SYS-2029P-C1R, SYS-6029P-TRT, SYS-6029P-TR, SYS-7049P-TRT, SYS-7049P-TR, SSG-2029P-ACR24H, SSG-2029P-ACR24L, SSG-6049P-E1CR36H, SYS-7049GP-TRT, SYS-2029TP-HTR, SYS-2029TP-HC0R, SYS-2029TP-HC1R, SYS-6029TP-HTR, SYS-6029TP-HC1R, SYS-6029TP-HC0R, SYS-2029P-TXRT, SYS-6039P-TXRT, SBI-4129P-C2N, SBI-4129P-T3N

Module Specifications

Rev. 05/16/19

DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM32RS4/32HCR	RDIMM	1.2V	32GB	4096Mx72	3200	22-22-22	C3	1
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code	Register Vendor / Rev.	DIMM Composition					
SK Hynix	H5ANAG4NCJR-XNC	16Gb	4096Mx4	2203	Rambus	B0	(4096Mx4)*72		

System Configuration


SETUP	System Information
AVL S/N	H180200-001
System S/N	n/a
Board Rev. (PBA)	n/a
CPU Type	Intel Xeon Gold 6252(PLCX) x2
Chipset	C621
BIOS / Date	3.5 /6/29/21
BMC / ME	1.45
FRU/SDR	n/a
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7/Memtest86+

Testing Summary

Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Reset Cycle	200 Loops	Pass
4. Memory Stress - Memtest86+	Room	2 Loops
5. Memory Stress-Stressapptest	40°C	24Hrs
		Pass

Note:

Memory Module Image

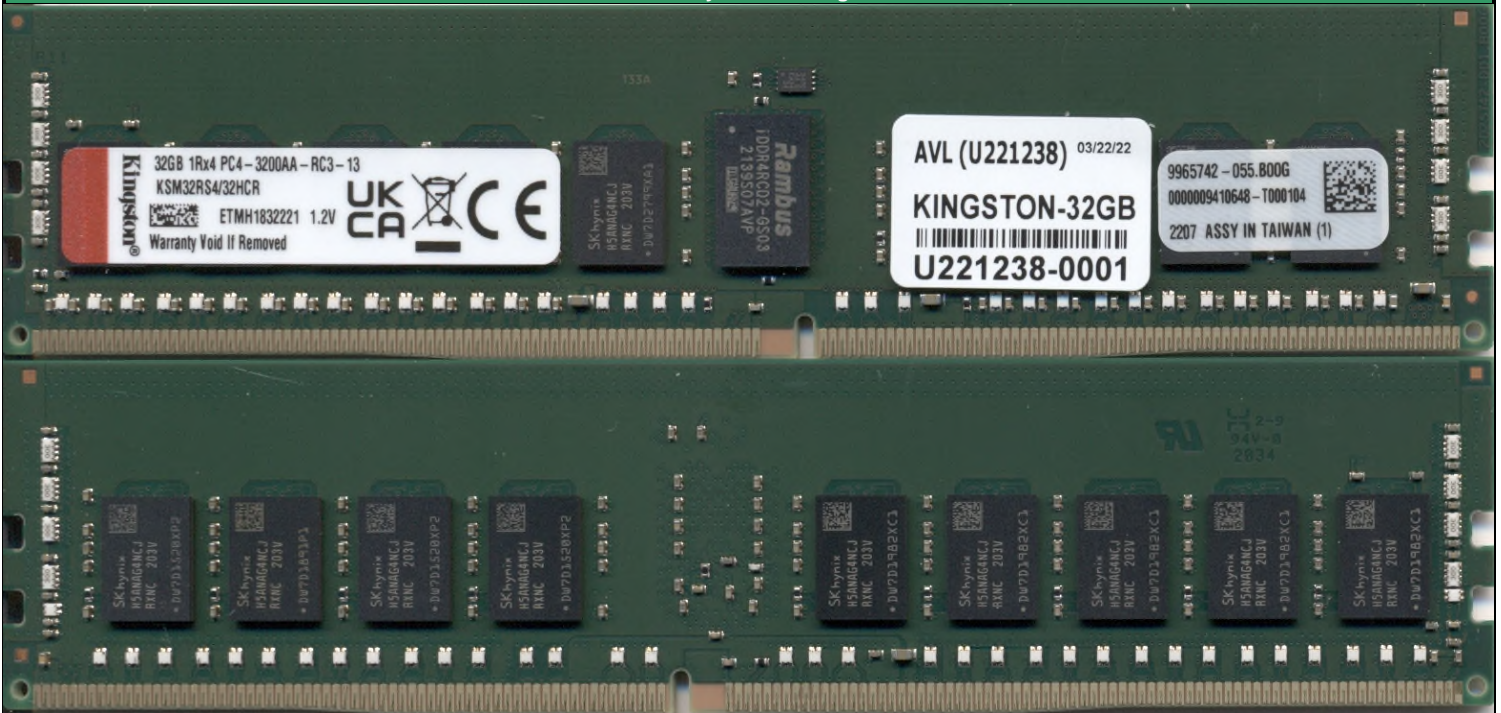

AVL USE ONLY:

Completed by:	Van Nguyen	Completion Date:	4/22/2022	AVL A#	U221238	AVL W/O	WG1337
Comments:							