

Server Memory Compatibility Test Certificate


Test System: **Supermicro X10SRi-F** Test Result: **Pass**

Leveraged System(s): X10SRL-F, X10SRH-CF, X10SRH-CLN4F, X10SRG-F, X10SRW-F, X10SRA, X10SRA-F, X10SRM-F, X10SRM-TF, X10SRG-F, X10SRW-F

Module Specifications										Rev. 1/13/2015
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank	
Kingston	KVR24R17D8/16MA	PC4-2400 RDIMM	1.20V	16GB	2Gx72	2400	16	E	DR	
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition			
Micron	MT40A1G8PM-083E:A	8Gb 1024Mx8bit 1620			Montage C0		(1024x8)*72			

System Configuration	
SETUP	System Information
AVL S/N	SV2269
System S/N	0M148S016129
Board Rev. (PBA)	1.01
CPU Type	Intel E5-2650 v4 (BDW) x1
Chipset	Intel C612
BIOS / Date	2.0 / 12/17/15
BMC / ME	1.89/3.0.5.422
FRU/SDR	N/A
OS	Redhat 6.5
Test Tool	SAT, Memory Stress v1077

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Reset Cycle	1 DIMM Per Channel when applicable	Pass
4a. Memory Stress	DIMM Loading per spec	8 hours per config
4b. Memory Benchmark		5 loops per config
4c. Reset Cycle		200 loops per config
5. Functional Stress Test		12 hours
Note:		

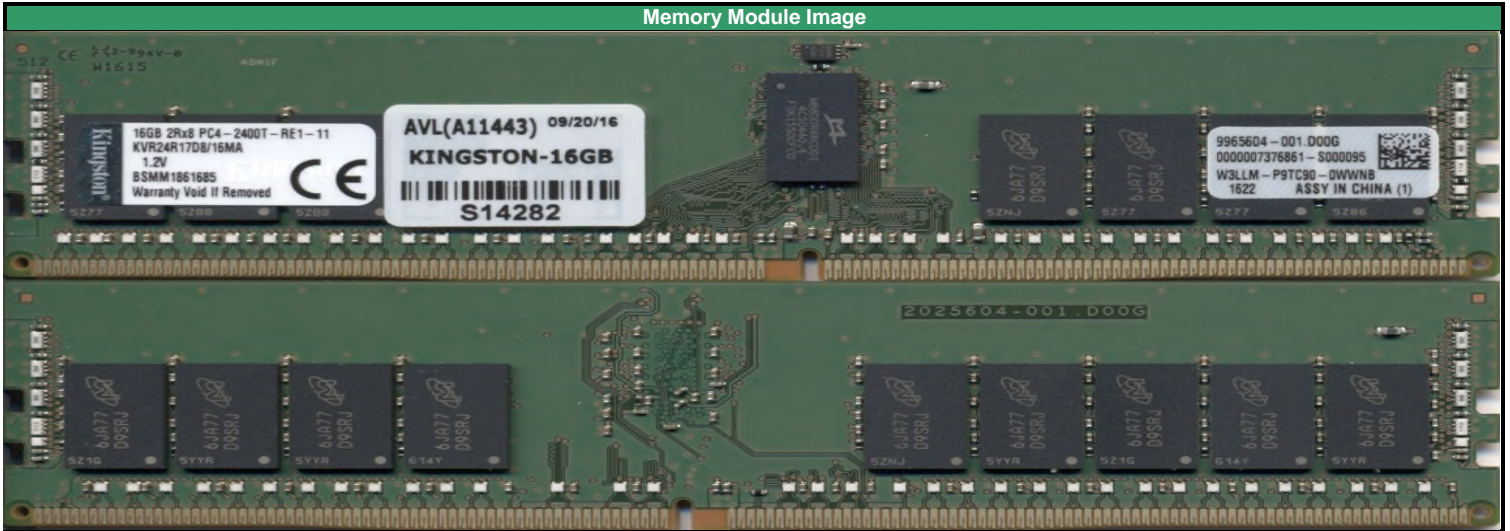

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	9/23/2016	AVL A#	11443	AVL W/O	WD6827
Comments:							