



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630




Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600WF (Wolf Pass)	Test Result: Pass

Leveraged System(s): R1208WFTYS, R1304WF, R1304WFOYS, R1304WFTYS, R2000WF, R2208WFOZS, R2208WFTZS, R2224WFTZS, R2308WFTZS, R2312WFOFP, R2312WFTZS, S2600WFO, S2600WFQ, S2600WFT

Modules Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM29RS4/16HCL	RDIMM	1.2V	16GB	2Gx72	2933	21	C2	SR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
SK Hynix	H5AN8G4NCJR-WMC	8Gb	2048Mx4bit	1910	IDT	C1	(2048Mx4)*72		

System Configuration		
SETUP	System #1	System #2
AVL S/N		
System S/N	BQWF83600199	
Board Rev. (PBA)	H48104-863	
CPU Type	Intel CLX 2.20 GHz	
Chipset	Intel 62X Series	
BIOS	01.0261	01.0261
BMC / ME	1.83 / 04.01.03.237	1.83 / 04.01.03.237
FUR/SDR	1.74	1.74
OS	Windows Server 2016 Standard	
Test Tool	iWVSS 2.8.0, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD Hot Pass
4. Memory Stress		HVDD Cold Pass
5. Memory Stress		LVDD Hot Pass
6. Memory Stress		LVDD Cold Pass
Note:		

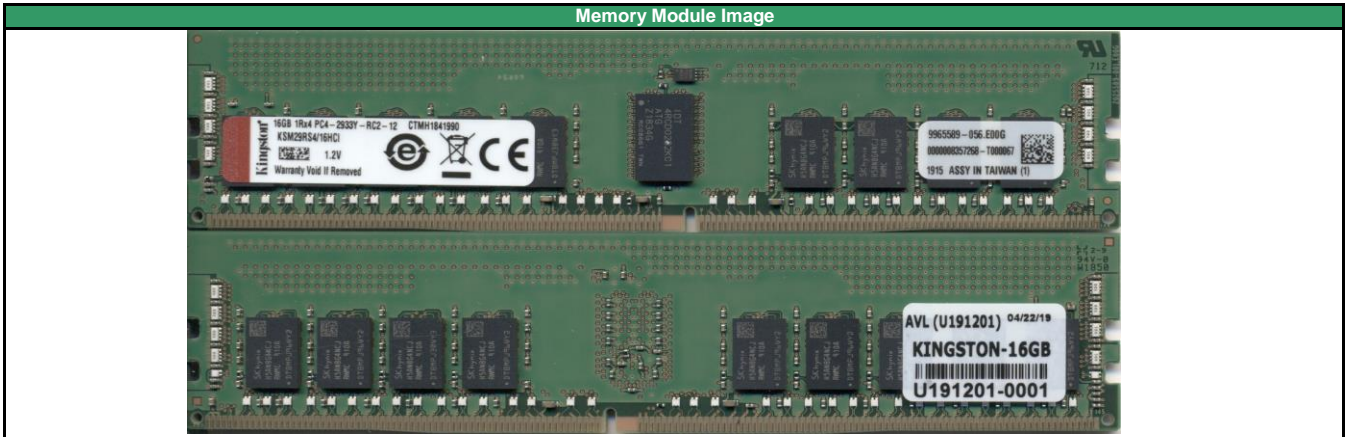

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	07/11/2019	AVL A#	U191201	AVL W/O	WF2547
Comments:							

Test Results						
4C						
Minimum Loading						
Start Date	6/19/2019					
DIMM Voltage	1.22v / 1.16v					
DIMM	S/N	A	B	C	D	
CPU1 A1	01-013	P	P	P	P	
CPU1 A2						
CPU1 B1	01-012	P	P	P	P	
CPU1 B2						
CPU1 C1	01-011	P	P	P	P	
CPU1 C2						
CPU1 D1	01-010	P	P	P	P	
CPU1 D2						
CPU1 E1	01-009	P	P	P	P	
CPU1 E2						
CPU1 F1	01-008	P	P	P	P	
CPU1 F2						
CPU2 G1	02-001	P	P	P	P	
CPU2 G2						
CPU2 H1	02-001	P	P	P	P	
CPU2 H2						
CPU2 I1	02-003	P	P	P	P	
CPU2 I2						
CPU2 J1	02-004	P	P	P	P	
CPU2 J2						
CPU2 K1	02-005	P	P	P	P	
CPU2 K2						
CPU2 L1	02-006	P	P	P	P	
CPU2 L2						

4C						
Maximum Loading						
Start Date	06/19/19					
DIMM Voltage	1.22v / 1.16v					
DIMM	S/N	A	B	C	D	
CPU1 A1	01-014	P	P	P	P	
CPU1 A2	01-015	P	P	P	P	
CPU1 B1	01-016	P	P	P	P	
CPU1 B2	01-017	P	P	P	P	
CPU1 C1	01-018	P	P	P	P	
CPU1 C2	01-019	P	P	P	P	
CPU1 D1	01-020	P	P	P	P	
CPU1 D2	01-021	P	P	P	P	
CPU1 E1	01-022	P	P	P	P	
CPU1 E2	01-023	P	P	P	P	
CPU1 F1	01-024	P	P	P	P	
CPU1 F2	01-025	P	P	P	P	
CPU2 G1	02-014	P	P	P	P	
CPU2 G2	02-015	P	P	P	P	
CPU2 H1	02-016	P	P	P	P	
CPU2 H2	02-017	P	P	P	P	
CPU2 I1	02-018	P	P	P	P	
CPU2 I2	02-019	P	P	P	P	
CPU2 J1	02-020	P	P	P	P	
CPU2 J2	02-021	P	P	P	P	
CPU2 K1	02-022	P	P	P	P	
CPU2 K2	02-023	P	P	P	P	
CPU2 L1	02-024	P	P	P	P	
CPU2 L2	02-025	P	P	P	P	