

Server Memory Compatibility Test Certificate

Test System: **Supermicro X11DPI-N (System SYS-6029P-TR)** Test Result: **Pass**


Leveraged Board(s) / System(s): X11DPI-N, X11DPI-NT, X11DAI-N, X11DPH-T, X11DPH-I, X11DPH-TQ, X11DPG-QT, X11DPT-PS, X11DPX-T, B11DRT-P, SYS-7039A-I, SYS-7049A-T, SSG-2029P-E1CR24H, SSG-2029P-E1CR24L, SSG-6029P-E1CR12T, SSG-6029P-E1CR16T, SSG-6039P-E1CR16H, SSG-6039P-E1CR16L, SYS-2029P-C1RT, SYS-2029P-C1R, SYS-6029P-TRT, SYS-6029P-TR, SYS-7049P-TRT, SYS-7049P-TR, SSG-2029P-ACR24H, SSG-2029P-ACR24L, SSG-6049P-E1CR36H, SYS-7049GP-TRT, SYS-2029TP-HTR, SYS-2029TP-HC0R, SYS-2029TP-HC1R, SYS-6029TP-HTR, SYS-6029TP-HC1R, SYS-6029TP-HC0R, SYS-2029P-TXRT, SYS-6039P-TXRT, SBI-4129P-C2N, SBI-4129P-T3N

Module Specifications										Rev. 05/16/19	
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank		
Kingston	KSM32RD8/32MER	RDIMM	1.2V	32GB	4096Mx72	3200	22-22-22	E4	2		
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition				
Micron Technology Inc.	MT40A2G8JC-062E:E	16Gb			2048Mx8		2018	Rambus	B0		(2048Mx8)*72

System Configuration	
SETUP	System Information
AVL S/N	H180200-001
System S/N	n/a
Board Rev. (PBA)	n/a
CPU Type	Intel Xeon Gold 6252(PLCX) x2
Chipset	C621
BIOS / Date	3.3 /2/21/20
BMC / ME	1.45
FRU/SDR	n/a
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7/Memtest86+

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Reset Cycle	200 Loops	Pass
4. Memoy Stress - Memtest86+	Room	2 Loops Pass
5. Memory Stress-Stressapptest	40°C	24Hrs Pass

Note:

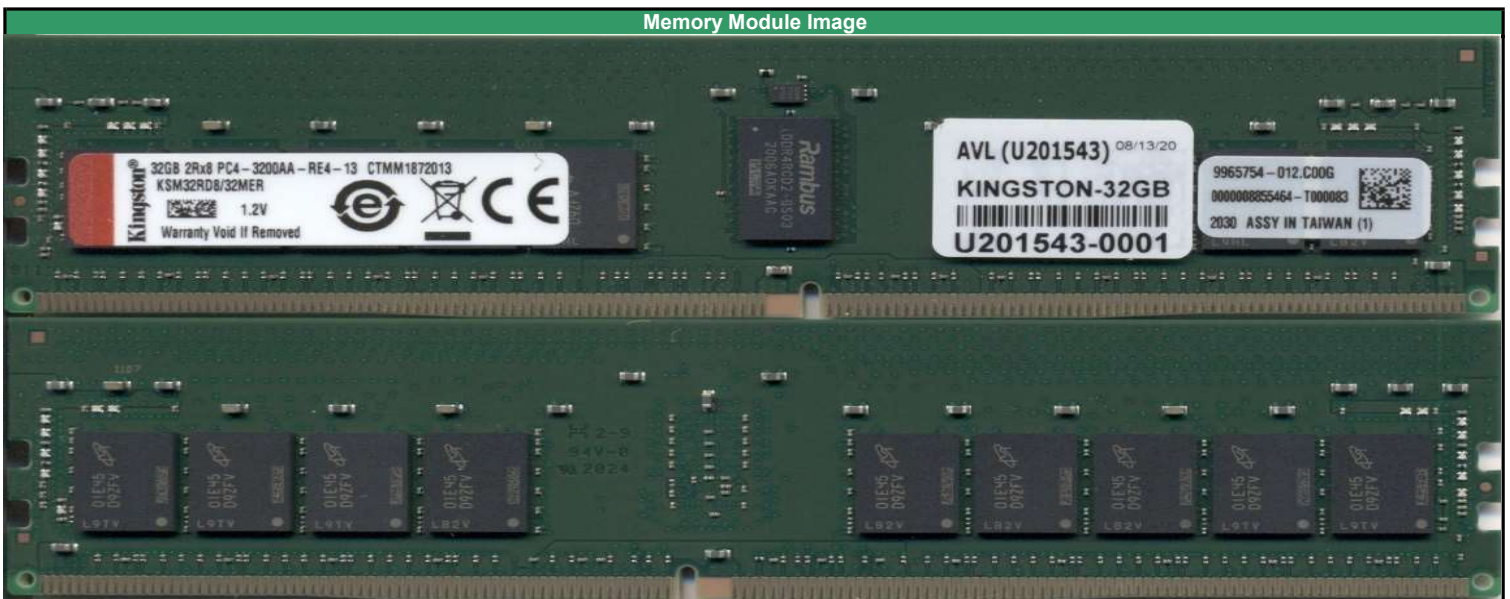

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	8/25/2020	AVL A#	U201543	AVL W/O	WF7230
Comments:							