



**Advanced Validation Labs, Inc.**

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630



Intel PCSD Server Memory Compatibility Test Certificate	
Test System: <b>Intel S2600CW (Cottonwood Pass)</b>	Test Result: <b>Pass</b>

Leveraged System(s): N/A


Modules Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KVR21R15D8/8L	RDIMM	1.2V	8GB	1Gx72	2133	15	E	DR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Kingston	H5AN4G8NAFR-TFC	4Gb	512Mx8bit	1539	Montage	1	(512Mx8)x2*72		

Leveraged Memory Modules						
Vendor	Type	Voltage	CL	Speed		
1 Kingston	KVR21R15D8K4/32L	RDIMM	1.2V	15	2133	
2						
3						
4						
5						
6						

System Configuration		
SETUP	System #1	System #2
AVL S/N	SU9557	SU9556
System S/N	FWCT44150269 / LVPP	FWCT44150034 / HVPP
Board Rev. (PBA)	H44615-202	
CPU Type	E5-2695 v3 / 2.30 GHz	
Chipset	C610	
BIOS / Date	01.01.0014 / 12-18-2015	
BMC / ME	01.33.8932 / 03.01.03.005	
FUR/SDR	1.10	
OS	Windows Server 2012 R2	
Test Tool	iWVSS 2.6.1, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD/HVPP Hot Pass
4. Memory Stress		HVDD/HVPP Cold Pass
5. Memory Stress		LVDD/LVPP Hot Pass
6. Memory Stress		LVDD/LVPP Cold Pass
Note:		

**Memory Module Image**

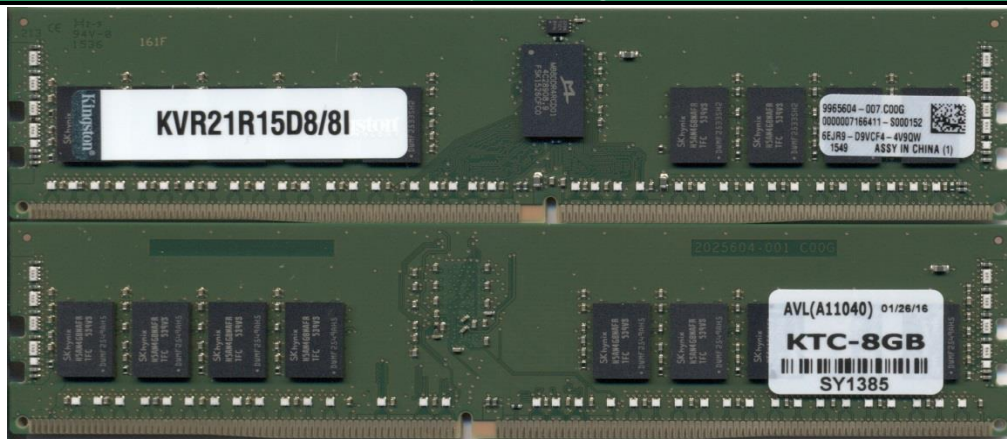

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	03/10/16	AVL A#	A11040	AVL W/O	WD4998
Comments:							

Test Results

4C					
Minimum Loading					
Start Date		3/1/2016			
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	SY1385	P	P	P	P
CPU1 A2					
CPU1 B1	SY1386	P	P	P	P
CPU1 B2					
CPU1 C1	SY1387	P	P	P	P
CPU1 C2					
CPU1 D1	SY1388	P	P	P	P
CPU1 D2					
CPU2 E1	SY1389	P	P	P	P
CPU2 E2					
CPU2 F1	SY1390	P	P	P	P
CPU2 F2					
CPU2 G1	SY1391	P	P	P	P
CPU2 G2					
CPU2 H1	SY1392	P	P	P	P
CPU2 H2					

4C					
Maximum Loading					
Start Date		03/01/16			
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	SY1385	P	P	P	P
CPU1 A2	SY1386	P	P	P	P
CPU1 B1	SY1387	P	P	P	P
CPU1 B2	SY1388	P	P	P	P
CPU1 C1	SY1389	P	P	P	P
CPU1 C2	SY1390	P	P	P	P
CPU1 D1	SY1391	P	P	P	P
CPU1 D2	SY1392	P	P	P	P
CPU2 E1	SY1393	P	P	P	P
CPU2 E2	SY1394	P	P	P	P
CPU2 F1	SY1395	P	P	P	P
CPU2 F2	SY1396	P	P	P	P
CPU2 G1	SY1397	P	P	P	P
CPU2 G2	SY1398	P	P	P	P
CPU2 H1	SY1399	P	P	P	P
CPU2 H2	SY1400	P	P	P	P