



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630




Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600CW (Cottonwood Pass)	Test Result: Pass

Leveraged System(s): S2600C2S,S2600CW,S2600CW2,S2600CW2R,S2600CW2SR,S2600CWT,S2600CWTR,S2600CWTS,S2600CWTSR

Modules Information										
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank	
Kingston	KSM32RS8/8HDR	RDIMM	1.2V	8GB	1Gx72	3200	22	D	SR	
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code		Register Vendor / Rev.		DIMM Composition				
SK Hynix	H5AN8G8NDJR-WMC	8Gb		1024Mx8bit		2013		Rambus	B0	(1024Mx8)*72

System Configuration		
SETUP	System #1	System #2
AVL S/N	SU9557	SU9556
System S/N	FWCT44150269 / LVPP	FWCT44150034 / HVPP
Board Rev. (PBA)	H44615-350	
CPU Type	E5-2680 v4 / 2.40 Ghz	
Chipset	C610	
BIOS	01.01.0028	
BMC / ME	1.56 / 051	
FUR/SDR	1.14	
OS	Windows Server 2012 R2	
Test Tool	iVSS 2.7.0, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD/HVPP Hot Pass
4. Memory Stress		HVDD/HVPP Cold Pass
5. Memory Stress		LVDD/LVPP Hot Pass
6. Memory Stress		LVDD/LVPP Cold Pass
Note:		

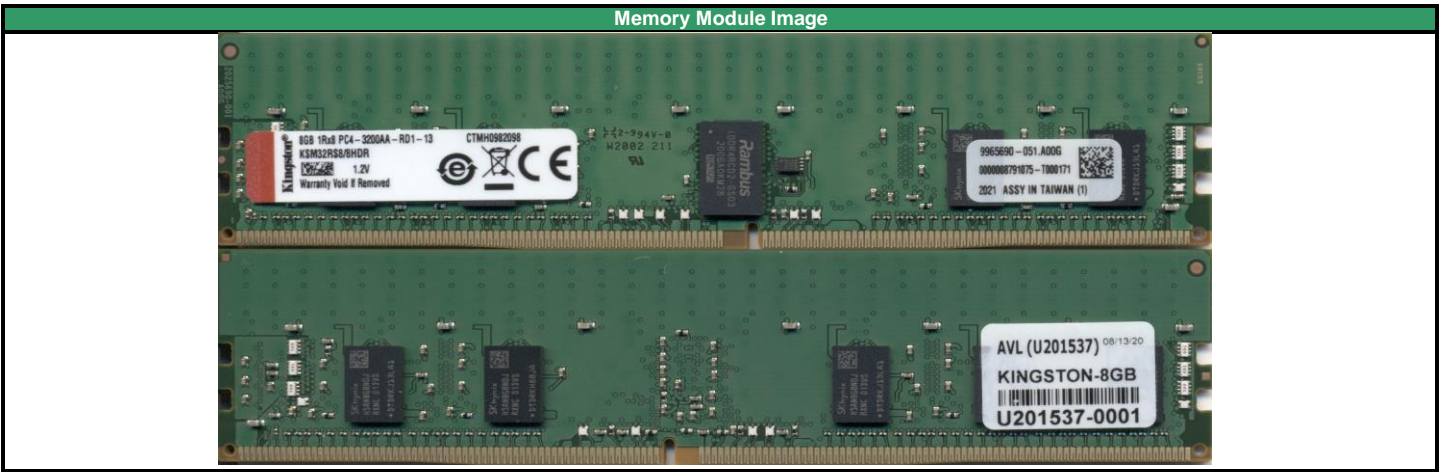

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	4/9/2021	AVL A#	U201537	AVL W/O	WF8212
Comments:							

4C Minimum Loading						
Start Date		3/30/2021				
DIMM Voltage		1.22v / 1.16v				
DIMM VPP		2.64v / 2.422v				
DIMM	S/N	A	B	C	D	
CPU1 A1	0001	P	P	P	P	P
CPU1 A2						
CPU1 B1	0002	P	P	P	P	P
CPU1 B2						
CPU1 C1	0003	P	P	P	P	P
CPU1 C2						
CPU1 D1	0004	P	P	P	P	P
CPU1 D2						
CPU2 E1	0005	P	P	P	P	P
CPU2 E2						
CPU2 F1	0006	P	P	P	P	P
CPU2 F2						
CPU2 G1	0007	P	P	P	P	P
CPU2 G2						
CPU2 H1	0008	P	P	P	P	P
CPU2 H2						

4C Maximum Loading						
Start Date		03/30/21				
DIMM Voltage		1.22v / 1.16v				
DIMM VPP		2.64v / 2.422v				
DIMM	S/N	A	B	C	D	
CPU1 A1	0001	P	P	P	P	P
CPU1 A2	0002	P	P	P	P	P
CPU1 B1	0003	P	P	P	P	P
CPU1 B2	0004	P	P	P	P	P
CPU1 C1	0005	P	P	P	P	P
CPU1 C2	0006	P	P	P	P	P
CPU1 D1	0007	P	P	P	P	P
CPU1 D2	0008	P	P	P	P	P
CPU2 E1	0009	P	P	P	P	P
CPU2 E2	0010	P	P	P	P	P
CPU2 F1	0011	P	P	P	P	P
CPU2 F2	0012	P	P	P	P	P
CPU2 G1	0013	P	P	P	P	P
CPU2 G2	0014	P	P	P	P	P
CPU2 H1	0015	P	P	P	P	P
CPU2 H2	0016	P	P	P	P	P