



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630



Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600CW (Cottonwood Pass)	Test Result: Pass

Leveraged System(s): S2600C2S,S2600CW,S2600CW2,S2600CW2R,S2600CW2SR,S2600CWT,S2600CWTR,S2600CWTS,S2600CWTSR


Modules Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KVR24R17S4/16I	RDIMM	1.2V	16GB	2Gx72	2400	17	C	SR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Hynix	H5AN8G4NAFR-UHC	8Gb	2048Mx4bit	1704	IDT	A	(2048Mx4)*72		

Leveraged Memory Modules						
Vendor	Part Number	Type	Voltage	CL	Speed	Rank
1	Kingston	KVR24R17S4K4/64I	RDIMM	1.2V	17	2400
2						
3						
4						
5						
6						

System Configuration		
SETUP	System #1	System #2
AVL S/N	SU9557	SU9556
System S/N	FWCT44150269 / LVPP	FWCT44150034 / HVPP
Board Rev. (PBA)	H44615-350	
CPU Type	E5-2680 v4 / 2.40 GHz	
Chipset	C610	
BIOS / Date	01.01.0015 / 01-28-2016	
BMC / ME	01.43.9685 / 03.01.03.021	
FUR/SDR	1.11	
OS	Windows Server 2012 R2	
Test Tool	iVSS 2.6.1, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD/HVPP Hot
4. Memory Stress		HVDD/HVPP Cold
5. Memory Stress		LVDD/LVPP Hot
6. Memory Stress		LVDD/LVPP Cold
Note:		

Memory Module Image

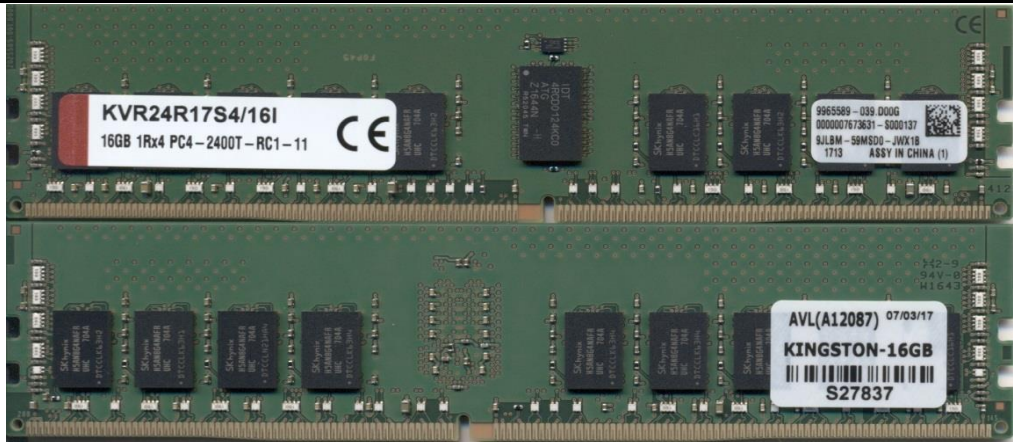

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	07/27/2017	AVL A#	A12087	AVL W/O	WD8166
Comments:							

Test Results

4C						
Minimum Loading						
Start Date		7/14/2017				
DIMM Voltage		1.22v / 1.16v				
DIMM VPP		2.64v / 2.422v				
DIMM	S/N	A	B	C	D	
CPU1 A1	S27862	P	P	P	P	
CPU1 A2						
CPU1 B1	S27863	P	P	P	P	
CPU1 B2						
CPU1 C1	S27864	P	P	P	P	
CPU1 C2						
CPU1 D1	S27865	P	P	P	P	
CPU1 D2						
CPU2 E1	S27866	P	P	P	P	
CPU2 E2						
CPU2 F1	S27867	P	P	P	P	
CPU2 F2						
CPU2 G1	S27868	P	P	P	P	
CPU2 G2						
CPU2 H1	S27870	P	P	P	P	
CPU2 H2						

4C						
Maximum Loading						
Start Date		07/14/17				
DIMM Voltage		1.22v / 1.16v				
DIMM VPP		2.64v / 2.422v				
DIMM	S/N	A	B	C	D	
CPU1 A1	S27837	P	P	P	P	
CPU1 A2	S27838	P	P	P	P	
CPU1 B1	S27839	P	P	P	P	
CPU1 B2	S27840	P	P	P	P	
CPU1 C1	S27841	P	P	P	P	
CPU1 C2	S27842	P	P	P	P	
CPU1 D1	S27843	P	P	P	P	
CPU1 D2	S27844	P	P	P	P	
CPU2 E1	S27845	P	P	P	P	
CPU2 E2	S27846	P	P	P	P	
CPU2 F1	S27847	P	P	P	P	
CPU2 F2	S27848	P	P	P	P	
CPU2 G1	S27849	P	P	P	P	
CPU2 G2	S27850	P	P	P	P	
CPU2 H1	S27851	P	P	P	P	
CPU2 H2	S27854	P	P	P	P	