

**Server Memory Compatibility Test Certificate**

Test System: **Supermicro X10SRI-F** Test Result: **Pass**


Leveraged System(s): X10SRL-F, X10SRH-CF, X10SRH-CLN4F, X10SRG-F, X10SRW-F, X10SRA, X10SRA-F, X10SRM-F, X10SRM-TF, X10SRG-F, X10SRW-F

Module Specifications										Rev. Rev. 05/16/19
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank	
Kingston	KSM26RD4/32HDI	RDIMM	1.2v	32GB	4096Mx72	2666	19-19-19	B2	2	
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition			
SK Hynix	H5AN8G4NDJR-XNC	8Gb	2048Mx4	2008	IDT	B1	(2048Mx4)*72			

System Configuration	
SETUP	System Information
AVL S/N	SV2269
System S/N	0M148S016129
Board Rev. (PBA)	1.01
CPU Type	Intel E5-2650 v4 (BDW) x1
Chipset	Intel C612
BIOS / Date	3.1c /5/19/2019
BMC / ME	1.89/3.0.5.422
FRU/SDR	N/A
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7 /Memtest86+

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	<b>Done</b>
2. SPD Check	DIMM SPD content check for JEDEC compliance	<b>Pass</b>
3. Reset Cycle	200 Loops	<b>Pass</b>
4. Memory Stress - Memtest86+	Room	2 Loops <b>Pass</b>
5. Memory Stress-Stressapptest	40°C	24Hrs <b>Pass</b>

Note:

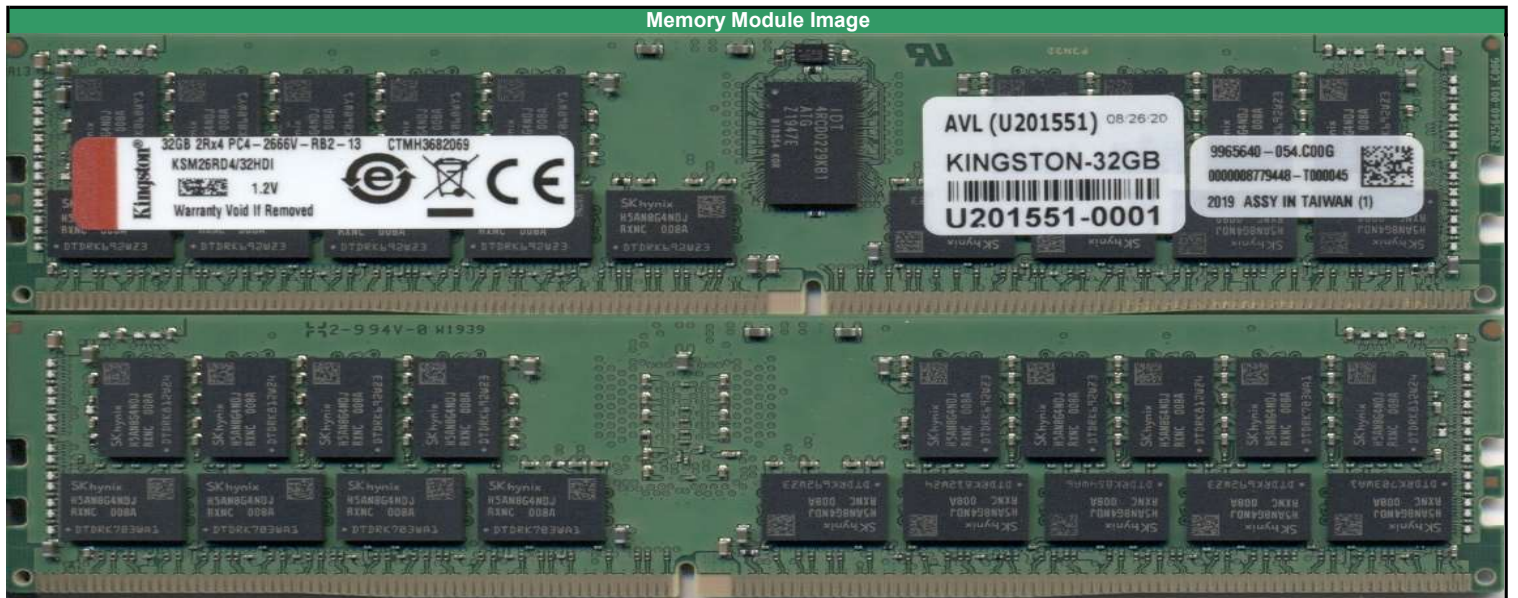

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	10/20/2020	AVL A#	U201551	AVL W/O	WF7809
Comments:							