

Server Memory Compatibility Test Certificate

Test System: **Supermicro X11DPI-N (System SYS-6029P-TR)** Test Result: **Pass**


Leveraged Board(s) / System(s): X11DPI-N, X11DPI-NT, X11DAI-N, X11DPH-T, X11DPH-I, X11DPH-TQ, X11DPG-QT, X11DPT-PS, X11DPX-T, B11DRT-P, SYS-7039A-I, SYS-7049A-T, SSG-2029P-E1CR24H, SSG-2029P-E1CR24L, SSG-6029P-E1CR12T, SSG-6029P-E1CR16T, SSG-6039P-E1CR16H, SSG-6039P-E1CR16L, SYS-2029P-C1RT, SYS-2029P-C1R, SYS-6029P-TRT, SYS-6029P-TR, SYS-7049P-TRT, SYS-7049P-TR, SSG-2029P-ACR24H, SSG-2029P-ACR24L, SSG-6049P-E1CR36H, SYS-7049GP-TRT, SYS-2029TP-HTR, SYS-2029TP-HC0R, SYS-2029TP-HC1R, SYS-6029TP-HTR, SYS-6029TP-HC1R, SYS-6029TP-HC0R, SYS-2029P-TXRT, SYS-6039P-TXRT, SBI-4129P-C2N, SBI-4129P-T3N

Module Specifications										Rev. 05/16/19	
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank		
Kingston	KSM26RD4/32HDI	RDIMM	1.2V	32GB	4096Mx72	2666	19-19-19	B2	2		
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition				
SK Hynix	H5AN8G4NDJR-XNC	8Gb			2048Mx4		2008		IDT	B1	(2048Mx4)*72

System Configuration	
SETUP	System Information
AVL S/N	H180200-001
System S/N	n/a
Board Rev. (PBA)	n/a
CPU Type	Intel Xeon Gold 6252(PLCX) x2
Chipset	C621
BIOS / Date	3.3 /2/21/20
BMC / ME	1.45
FRU/SDR	n/a
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7/Memtest86+

Testing Summary			
Test Items	Test Description	Test Results	
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done	
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass	
3. Reset Cycle	200 Loops	Pass	
4. Memoy Stress - Memtest86+	Room	2 Loops	Pass
5. Memory Stress-Stressapptest	40°C	24Hrs	Pass

Note:

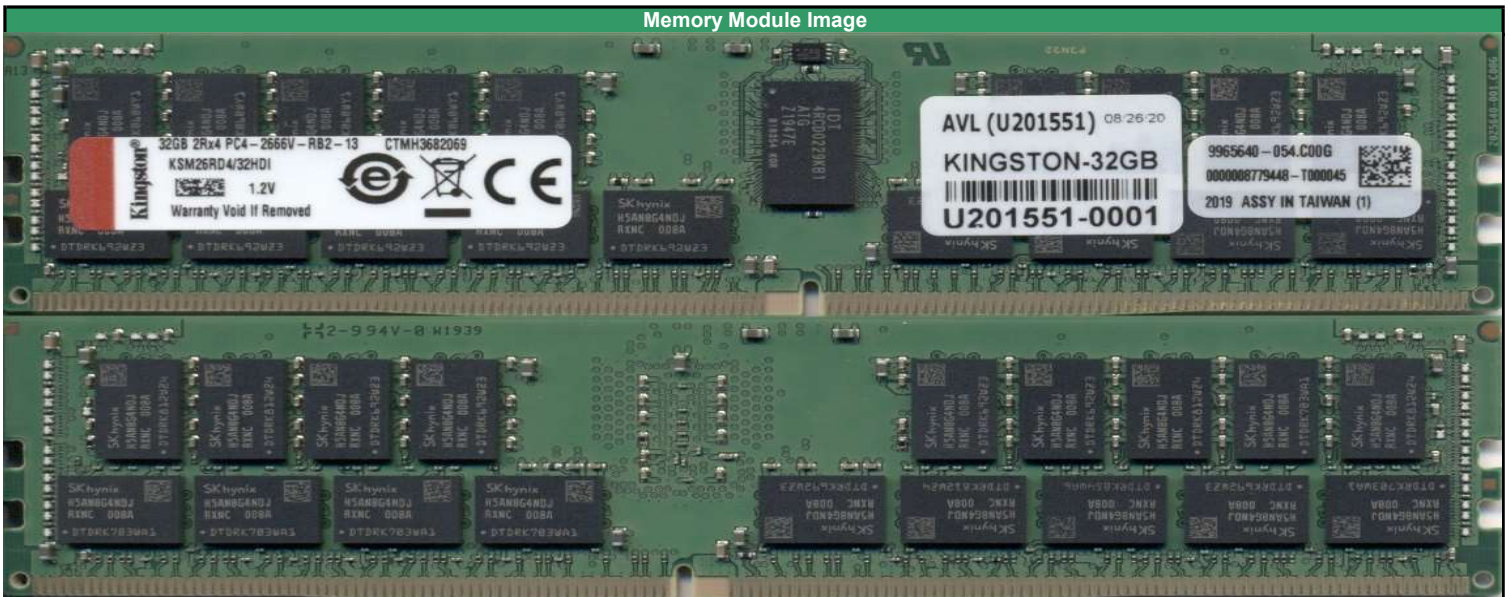

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	11/6/2020	AVL A#	U201551	AVL W/O	WF7437
Comments:							