

**Server Memory Compatibility Test Certificate**

Test System: **Supermicro X11SPW-TF (System SYS-5029P-WTR)**

Test Result: **Pass**

Leveraged Board(s) / System(s): X11SPW-TF, X11SPW-CTF, X11SPM-TPF, X11SPM-TF, X11SPM-F, X11SPG-TF, SYS-1019P-WTR, SYS-5019P-WT, SYS-5019P-WTR, SYS-5029P-WTR, SYS-5019GP-TT, SYS-1019GP-TT

**Module Specifications**

Rev. 3/27/2018

DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM26RD8/16HAI	RDIMM	1.2V	16GB	2Gx72	2666	19	E2	DR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Kingston	H5AN8G8NAFR-VKC	8Gb 1024Mx8bit 1726			IDT B1		(2048x8)*72		

**System Configuration**


SETUP	System Information
AVL S/N	H180199-001
System S/N	N80205
Board Rev. (PBA)	1.02
CPU Type	Intel Xeon Gold 6130(SKX) x2
Chipset	Skylake
BIOS / Date	2.0b /2/26/18
BMC / ME	n/a
FRU/SDR	n/a
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7

**Testing Summary**

Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	<b>Done</b>
2. SPD Check	DIMM SPD content check for JEDEC compliance	<b>Pass</b>
3. Reset Cycle	1 DIMM Per Channel when applicable	<b>Pass</b>
4a. Memory Stress	DIMM Loading per spec 45°C	24 Hours <b>Pass</b>
4c. Reset Cycle		200 loops per config <b>Pass</b>

Note:

**Memory Module Image**

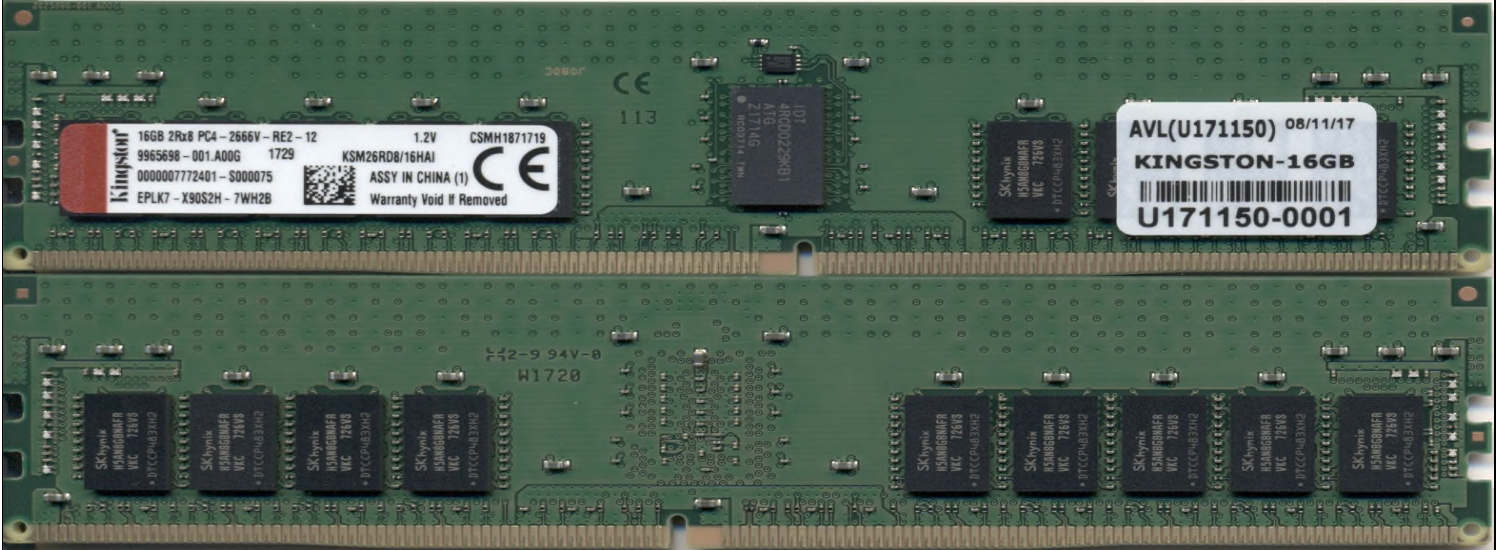

**AVL USE ONLY:**

Completed by:	Van Nguyen	Completion Date:	11/6/2018	AVL A#	U171150	AVL WO	WF1764
Comments: Mixed with U171149-KSM26RD8/16HAM							