

**Server Memory Compatibility Test Certificate**

Test System: **Supermicro X11DPI-N (System SYS-6029P-TR)** Test Result: **Pass**

Leveraged Board(s) / System(s): X11DPI-N, X11DPI-NT, X11DAI-N, X11DPH-T, X11DPH-I, X11DPH-TQ, X11DPG-QT, X11DPT-PS, X11DPX-T, B11DRT-P, SYS-7039A-I, SYS-7049A-T, SSG-2029P-E1CR24H, SSG-2029P-E1CR24L, SSG-6029P-E1CR12T, SSG-6029P-E1CR16T, SSG-6039P-E1CR16H, SSG-6039P-E1CR16L, SYS-2029P-C1RT, SYS-2029P-C1R, SYS-6029P-TRT, SYS-6029P-TR, SYS-7049P-TRT, SYS-7049P-TR, SSG-2029P-ACR24H, SSG-2029P-ACR24L, SSG-6049P-E1CR36H, SYS-7049GP-TRT, SYS-2029TP-HTR, SYS-2029TP-HC0R, SYS-2029TP-HC1R, SYS-6029TP-HTR, SYS-6029TP-HC1R, SYS-6029TP-HC0R, SYS-2029P-TXRT, SYS-6039P-TXRT, SBI-4129P-C2N, SBI-4129P-T3N

**Module Specifications**

Rev. 3/27/2018

DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank		
Kingston	KSM29RS4/16HCI	RDIMM	1.2V	16GB	2Gx72	2933	21	C2	SR		
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code		Register Vendor / Rev.		DIMM Composition					
Sk Hynix	H5AN8G4NCJR-WMC	8Gb		2048Mx4bit		1910		IDT		C1	(2408x4)*72

**System Configuration**


SETUP	System Information
AVL S/N	H180200-001
System S/N	n/a
Board Rev. (PBA)	n/a
CPU Type	Intel Xeon Gold 6252(PLCX) x2
Chipset	Skylake
BIOS / Date	3.0c /4/01/19
BMC / ME	1.45
FRU/SDR	n/a
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7/Memtest86

**Testing Summary**

Test Items	Test Description	Test Results	
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done	
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass	
3. Reset Cycle	Room	200 Loops	Pass
4. Memory Stress - Stressapptest	Max Load 45°C	24 Hours	Pass
5. Memory Stress- Memtest86		4 Loops	Pass

Note:

**Memory Module Image**

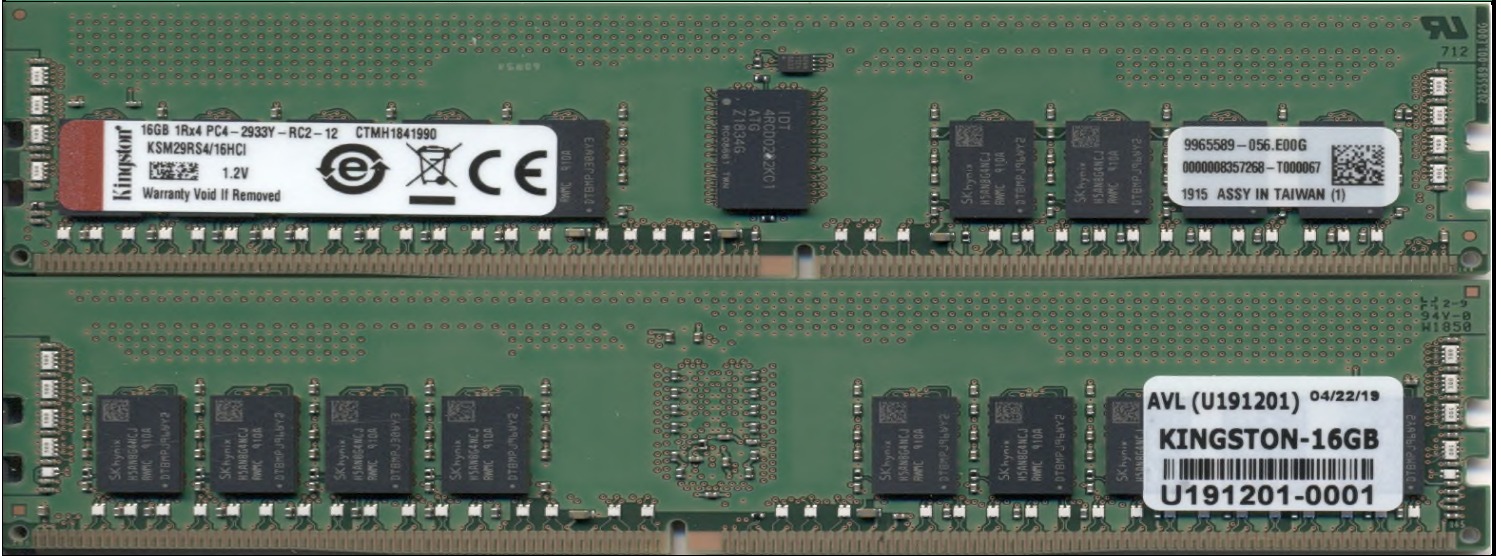

**AVL USE ONLY:**

Completed by:	Van Nguyen	Completion Date:	4/25/2019	AVL A#	U191201	AVL W/O	WF2447
---------------	------------	------------------	-----------	--------	---------	---------	--------

Comments: