

Server Memory Compatibility Test Certificate


Test System: **Supermicro X10DRL-i** Test Result: **Pass**

Leveraged System(s): X10DRFF / X10DRFF-C / X10DAL-i, X10DRL-iT, X10DRL-C, X10DRL-CT, X10DRT-L, X10DRT-LIBQ, X10DRT-LIBF, X10DRT-H, X10DRT-HIBF, 10DRD-i, X10DRD-iT, X10DRD-iNT, X10DRD-iNTP, X10DRD-iTP, X10DRD-L, X10DRD-LT, X10DRD-LTP

Module Specifications									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM32RD4/32HDR	RDIMM	1.2v	32GB	4096Mx72	3200	22-22-22	B2	2
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
SK Hynix	H5AN8G4NDJR-XNC	8Gb	2048Mx4	2008	Rambus	B0	(2048Mx4)*72		

System Configuration	
SETUP	System Information
AVL S/N	SV2270
System S/N	ZM148S022136
Board Rev. (PBA)	1.01
CPU Type	Intel E5-2650 v4 (BDW) x2
Chipset	Intel C612
BIOS / Date	3.2 / 11/19/2019
BMC / ME	1.94
FRU/SDR	N/A
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7 / Memtest86+

Testing Summary				
Test Items	Test Description		Test Results	
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS		Done	
2. SPD Check	DIMM SPD content check for JEDEC compliance		Pass	
3. Reset Cycle	Max Load	200 Loops	Pass	
4. Memoy Stress - Memtest86+		Room	2 Loops	Pass
5. Memory Stress-Stressapptest		40°C	24Hrs	Pass
Note:				

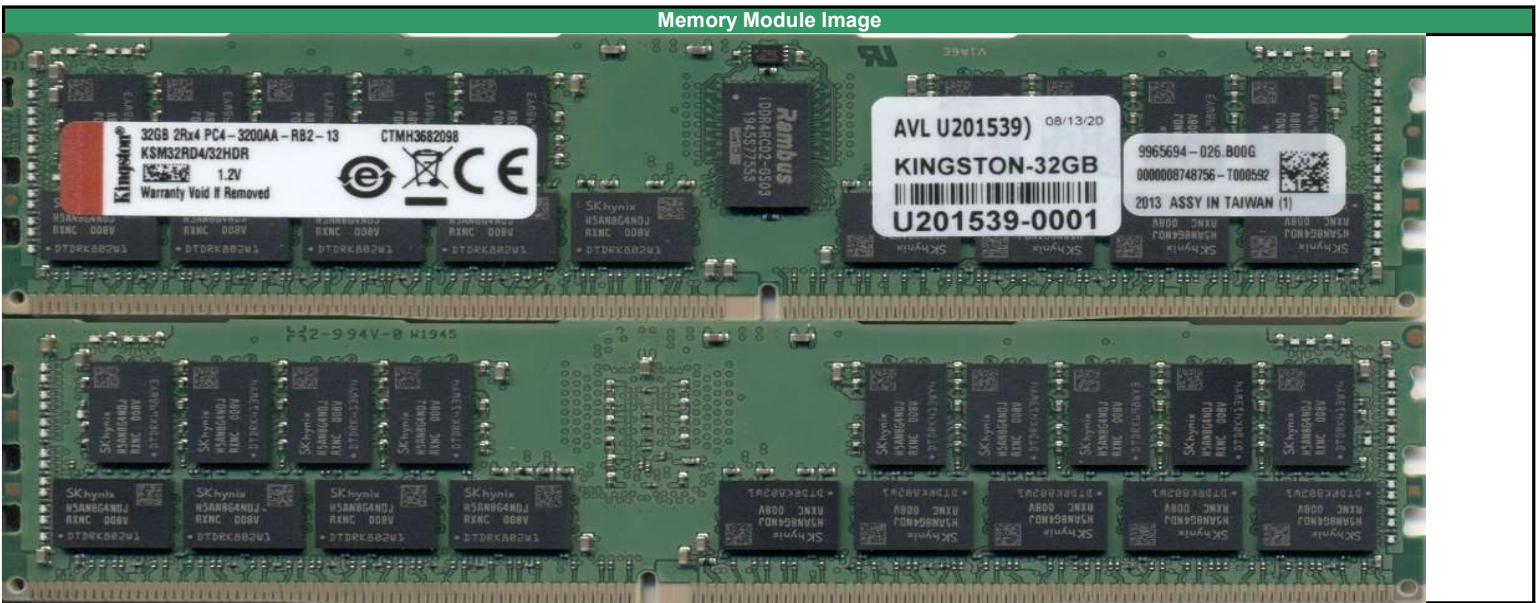

AVL USE ONLY:

Completed by:	Van Nguyen	Completion Date:	10/15/2020	AVL A#	U201539	AVL W/O	WF7798
---------------	------------	------------------	------------	--------	---------	---------	--------

