

**Server Memory Compatibility Test Certificate**


Test System: **Supernmicro X10DRi-BDX** Test Result: **Pass**

Leveraged System(s): X10DRi-T, X10DAi, X10DAC, X10DRH-CT, X10DRW-i / X10DRW-iT, X10DDW-i / X10DDW-iN, X10DRG-H / X10DRG-HT, X10DRT-P / X10DRT-PT, X10DRT-PIBQ / X10DRT-PIBF, X10DRFR / X10DRFR-T / X10DRH-C, X10DRH-CLN4, X10DRH-ILN4, X10DRT-PS, X10DRX, X10DRU-X, X10DRU-XLL, X10DRFF-CG, X10DRFF-CTG, X10DRFF-IG, X10DRFF-ITG, X10DGQ, X10DRG-Q

Module Specifications										Rev. Rev. 05/16/19
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank	
Kingston	KSM32RS4/16HDR	RDIMM	1.2v	16GB	2048Mx72	3200	22-22-22	C2	1	
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition			
SK Hynix	H5AN8G4NDJR-XNC	8Gb 2048Mx4 2008			Rambus B0		(2048Mx4)*72			

System Configuration	
SETUP	System Information
AVL S/N	SV2271
System S/N	0M148004057
Board Rev. (PBA)	1.01
CPU Type	Intel E5-2650 v4 (BDW) x2
Chipset	Intel C612
BIOS / Date	3.2 /11/22/2019
BMC / ME	1.94/3.0.6.267
FRU/SDR	1.02
OS	Ubuntu 16.04 LTS
Test Tool	Stressapptest 1.0.7 /Memtest86+

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Reset Cycle	200 Loops	Pass
4. Memoy Stress - Memtest86+	Room	2 Loops
5. Memory Stress-Stressapptest	40°C	24Hrs
Note:		

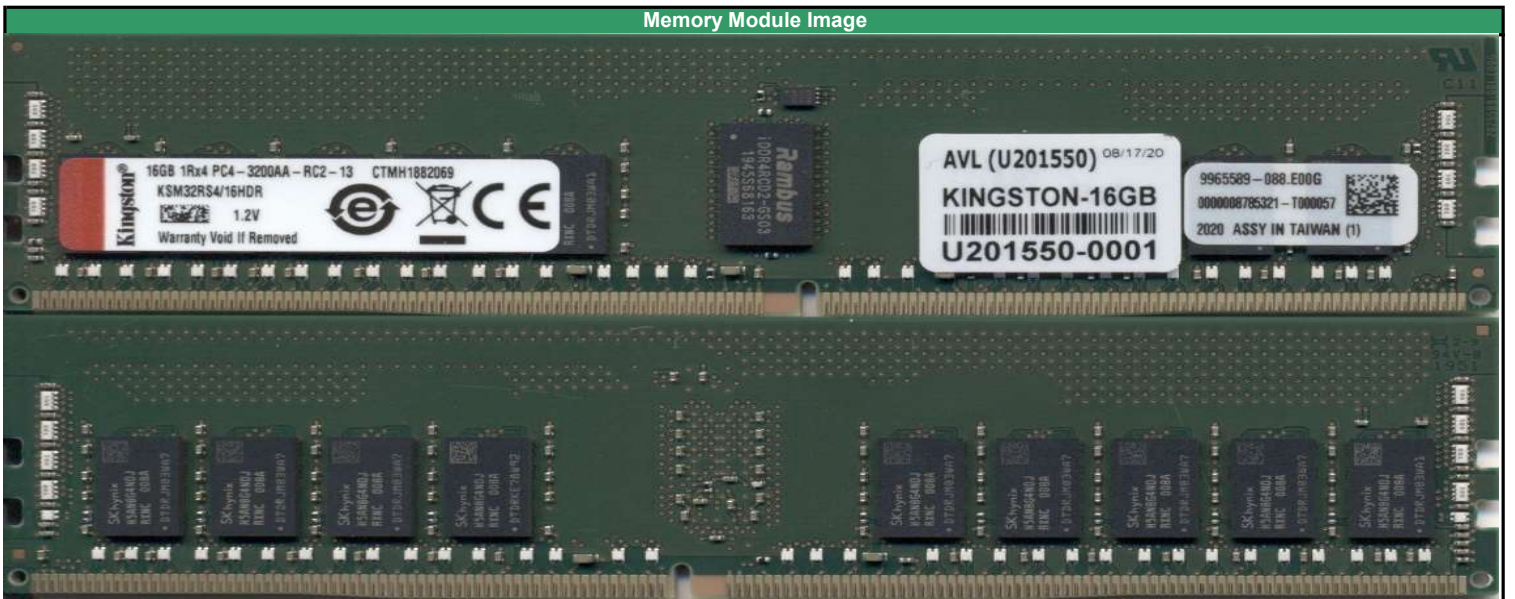

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	12/8/2020	AVL A#	U201550	AVL W/O	WF7292
Comments:							