



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630



Intel PCSD Server Memory Compatibility Test Certificate

Test System: **Intel S2600ST (SawTooth Pass)**

Test Result: **Pass**

Leveraged System(s): BBS2600BPB,BBS2600BPQ,BBS2600BPS,HNS2600BPB,HNS2600BPB24,HNS2600BPQ,HNS2600BPQ24,HNS2600BPS,HNS2600BPS24,S2600BP

Modules Information

DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM24RD4/32MAI	RDIMM	1.2V	32GB	4Gx72	2400	17	B	DR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Micron	MT40A2G4PM-083E:A	8Gb	2048Mx4bit	1712	IDT	C0	(2048Mx4)*2*72		


System Configuration

SETUP	System #1	System #2
AVL S/N	H170061-001	H170061-002
System S/N	FWSP71420190	FWSP71420144
Board Rev. (PBA)	J17012-400	
CPU Type	E5-2690 v4 / 2.60 GHz	
Chipset	C610	
BIOS	0X.01.0008	
BMC / ME	1.02 / 04.00.03.211	
FUR/SDR	1.01	
OS	Windows Server 2012 R2	
Test Tool	iVVSS 2.7.0, SELViewer, Syscfg, WinPIRA	

Testing Summary

Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD Hot Pass
4. Memory Stress		HVDD Cold Pass
5. Memory Stress		LVDD Hot Pass
6. Memory Stress		LVDD Cold Pass
Note:		

Memory Module Image

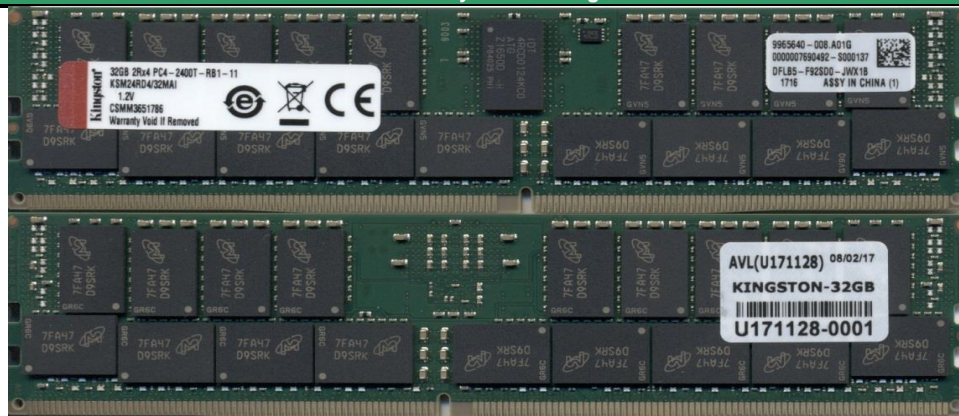

AVL USE ONLY:

Completed by:	Andy Chang	Completion Date:	09/29/2017	AVL A#	U171128	AVL W/O	WF0229
Comments:							

Test Results

4C					
Minimum Loading					
Start Date		9/22/2017			
DIMM Voltage		1.22v / 1.16v			
DIMM	S/N	A	B	C	D
CPU1 A1	0009	P	P	P	P
CPU1 A2					
CPU1 B1	0010	P	P	P	P
CPU1 C1	0011	P	P	P	P
CPU1 D1	0012	P	P	P	P
CPU1 D2					
CPU2 E1	0013	P	P	P	P
CPU2 F1	0014	P	P	P	P
CPU2 G1	0009	P	P	P	P
CPU2 G2					
CPU2 H1	0010	P	P	P	P
CPU2 I1	0011	P	P	P	P
CPU2 J1	0012	P	P	P	P
CPU2 J2					
CPU2 K1	0013	P	P	P	P
CPU2 L1	0014	P	P	P	P

4C					
Maximum Loading					
Start Date		09/22/17			
DIMM Voltage		1.22v / 1.16v			
DIMM	S/N	A	B	C	D
CPU1 A1	0001	P	P	P	P
CPU1 A2	0002	P	P	P	P
CPU1 B1	0003	P	P	P	P
CPU1 C1	0004	P	P	P	P
CPU1 D1	0005	P	P	P	P
CPU1 D2	0006	P	P	P	P
CPU2 E1	0007	P	P	P	P
CPU2 F1	0008	P	P	P	P
CPU2 G1	0001	P	P	P	P
CPU2 G2	0002	P	P	P	P
CPU2 H1	0003	P	P	P	P
CPU2 I1	0004	P	P	P	P
CPU2 J1	0005	P	P	P	P
CPU2 J2	0006	P	P	P	P
CPU2 K1	0007	P	P	P	P
CPU2 L1	0008	P	P	P	P