



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630



Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600WF (Wolf Pass)	Test Result: Pass


Leveraged System(s): R1208WFTYS, R1304WF, R1304WF0YS, R1304WFTYS, R2000WF, R2208WF0ZS, R2208WFTZS, R2224WFTZS, R2308WFTZS, R2312WF0NP, R2312WFTZS, S2600WF0, S2600WFQ, S2600WFT

Modules Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KSM26RS4/16HAI	RDIMM	1.2V	16GB	2Gx72	2666	19	C	SR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.				
Hynix	H5AN8G4NAFR-VKC	8Gb	2048Mx4bit	1714	IDT	B1			

System Configuration		
SETUP	System #1	System #2
AVL S/N	WP390	WP305
System S/N	BQWF71100390	BQWF71100305
Board Rev. (PBA)	H87179-710	
CPU Type	E5-2690 v4 / 2.60 GHz	
Chipset	C610	
BIOS	0X.01.0008	
BMC / ME	1.02 / 04.00.03.211	
FUR/SDR	1.02	
OS	Windows Server 2012 R2	
Test Tool	iVVSS 2.7.0, SELViewer, Syscfg, WinPIRA	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD/HVPP Hot Pass
4. Memory Stress		HVDD/HVPP Cold Pass
5. Memory Stress		LVDD/LVPP Hot Pass
6. Memory Stress		LVDD/LVPP Cold Pass
Note:		

Memory Module Image

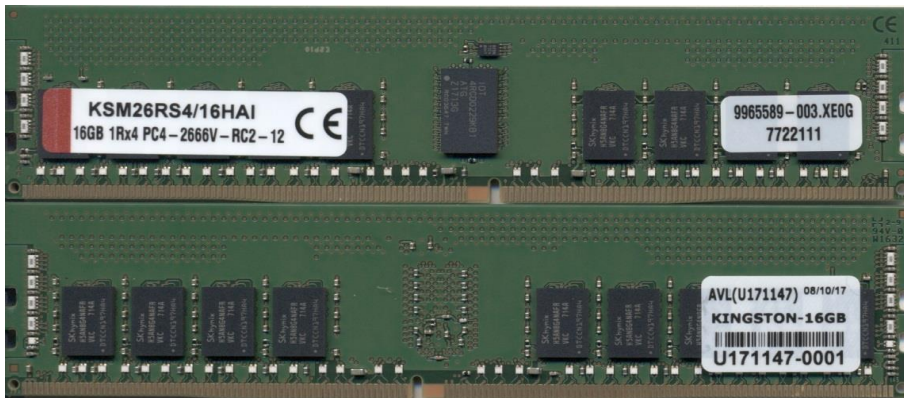

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	08/25/2017	AVL A#	U171146/U171147	AVL W/O	WF0216/WF0219
Comments:							

Test Results

4C					
Minimum Loading					
Start Date					
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	46-0015	P	P	P	P
CPU1 A2					
CPU1 B1	46-0016	P	P	P	P
CPU1 B2					
CPU1 C1	46-0017	P	P	P	P
CPU1 C2					
CPU1 D1	46-0018	P	P	P	P
CPU1 D2					
CPU1 E1	46-0019	P	P	P	P
CPU1 E2					
CPU1 F1	46-0020	P	P	P	P
CPU1 F2					
CPU2 G1	47-0015	P	P	P	P
CPU2 G2					
CPU2 H1	47-0016	P	P	P	P
CPU2 H2					
CPU2 I1	47-0017	P	P	P	P
CPU2 I2					
CPU2 J1	47-0018	P	P	P	P
CPU2 J2					
CPU2 K1	47-0019	P	P	P	P
CPU2 K2					
CPU2 L1	47-0020	P	P	P	P
CPU2 L2					

4C					
Maximum Loading					
Start Date					
DIMM Voltage		1.22v / 1.16v			
DIMM VPP		2.64v / 2.422v			
DIMM	S/N	A	B	C	D
CPU1 A1	46-0021	P	P	P	P
CPU1 A2	46-0022	P	P	P	P
CPU1 B1	46-0023	P	P	P	P
CPU1 B2	46-0024	P	P	P	P
CPU1 C1	46-0025	P	P	P	P
CPU1 C2	46-0026	P	P	P	P
CPU1 D1	46-0027	P	P	P	P
CPU1 D2	46-0028	P	P	P	P
CPU1 E1	46-0029	P	P	P	P
CPU1 E2	46-0030	P	P	P	P
CPU1 F1	46-0031	P	P	P	P
CPU1 F2	46-0032	P	P	P	P
CPU2 G1	47-0021	P	P	P	P
CPU2 G2	47-0022	P	P	P	P
CPU2 H1	47-0023	P	P	P	P
CPU2 H2	47-0024	P	P	P	P
CPU2 I1	47-0025	P	P	P	P
CPU2 I2	47-0026	P	P	P	P
CPU2 J1	47-0027	P	P	P	P
CPU2 J2	47-0028	P	P	P	P
CPU2 K1	47-0029	P	P	P	P
CPU2 K2	47-0030	P	P	P	P
CPU2 L1	47-0031	P	P	P	P
CPU2 L2	47-0032	P	P	P	P